


2

1


Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

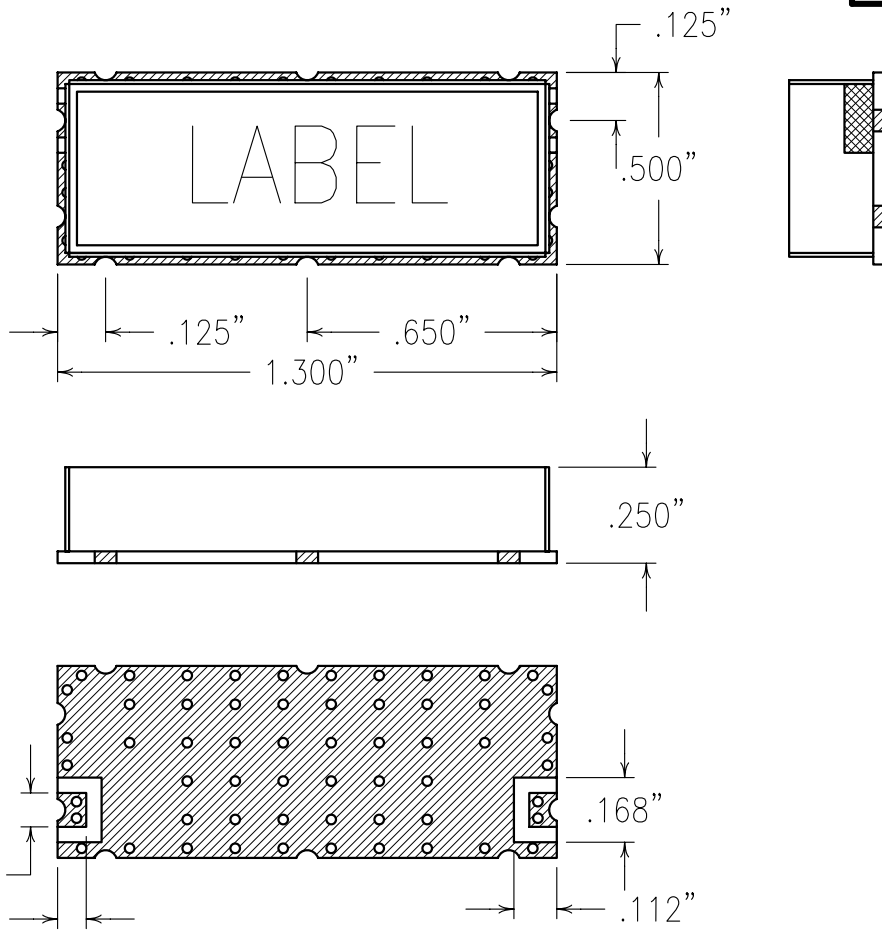


ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY	1075 MHz
3dB BANDWIDTH	200 MHz nom.
LOSS @ fo	≤ 1.0 dB
	≤ 1.5:1
25 dB REJECTION	800 MHz
IMPEDANCE (OHMS)	50

COPY

 COPPER



NOTES:

ENGLISH / METRIC ENGLISH		CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY	A	05MAR97	MJG	DEV.	GEN. REV. PER 0209
MACHINED SURFACES TO BE 125 OR BETTER		ENGINEER	II	27FEB97	MJG	DEV.	INT. ISS. PER 0207
REMOVE ALL BURRS		MJG	REV	DATE	BY	DCN No.	REMARKS
ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC: COAXIAL FILTER				
XX ± .02	.X ± .25	2: 1					
.XXX ± .01	.XX ± .13	DATE	TITLE: 4BLCL-1075/200-L				
ANGLES ± 0° 30'		05MAR97	SHEET NO/DF 1 1				
		Material: N/A			DRAWING No. 0L0022		
		Finish: N/A					