


2





1

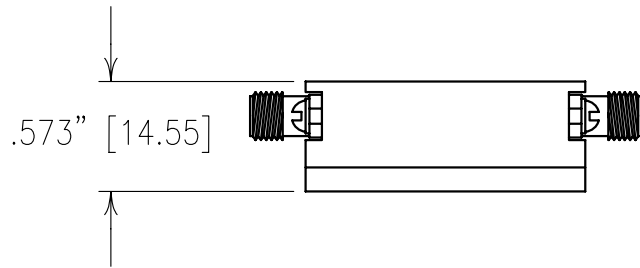

COPY

ELECTRICAL CHARACTERISTICS

PASSBAND1: 1300-1420 MHz
 PB1 RETURN LOSS: 1.7:1 TYP.
 PASSBAND2: 1620-1720 MHz
 PB2 RETURN LOSS: 1.5:1
 REJECTION:
 25 dBc MIN @ 1570-1574 MHz
 60 dBc MIN @ 1574-1576 MHz
 20 dBc MIN @ 1576-1580 MHz
 INSERTION LOSS:
 1.1 dBc @ 1300-1450 MHz
 1.2 dBc @ 1620-1720 MHz

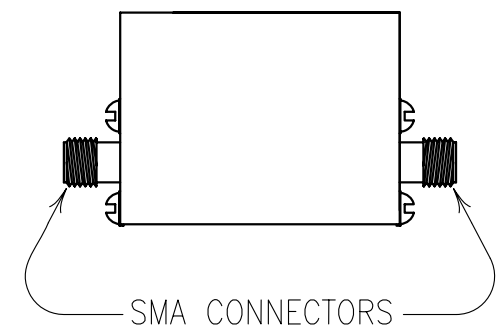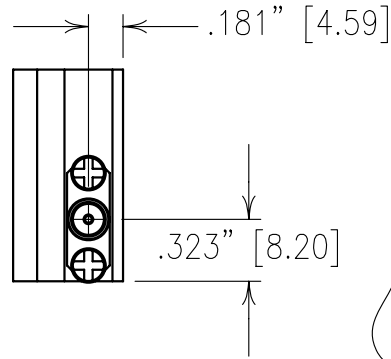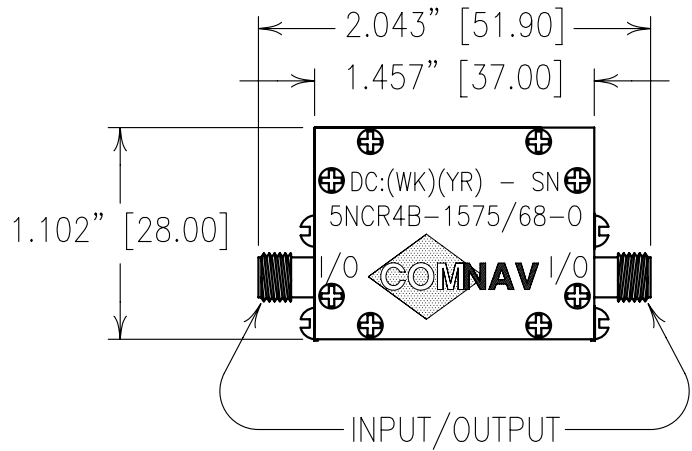

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:

FILTER IS ROHS COMPLIANT.
 FILTER MAY BE LABELED OR ETCHED.

ENGLISH / METRIC ENGLISH		CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 OR BETTER REMOVE ALL BURRS		DRAWN BY PBF					
		ENGINEER KJR		II	29MAY07	KJR	DEV. INI. ISS. PER 2678
				REV	DATE	BY	DCN No. REMARKS
ENGLISH (INCHES) .XX ±.02 .XXX ±.01	METRIC (MM) .X ±.25 .XX ±.13	SCALE 1:1		APPLIC: CERAMIC COAXIAL FILTER			
ANGLES ± 0° 30'		DATE 17AUG07		TITLE: 5NCR4B-1575/68-0			
FINISH: HOUSING: N/A		DRAWING No. OL0743		SHEET/OF 1/1			

