


2

1


Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

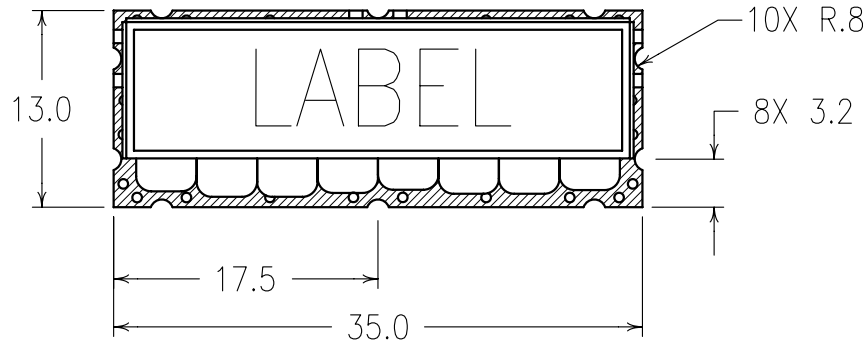

TOP VIEW

ELECTRICAL CHARACTERISTICS		
	CHANNEL 1	CHANNEL 2
fo	2315 MHz	2385 MHz
1 dB BANDWIDTH	30 MHz	30 MHz
40 dB BANDWIDTH	110 MHz	110 MHz
INSERTION LOSS	3.0 dB	3.0 dB
RIPPLE	0.5 dB	0.5 dB
GROUP DELAY VAR.	<50 nsec	<50 nsec
VSWR	2.0:1	2.0:1
OPERATING TEMP.	-25°C TO +70°C	


COPY

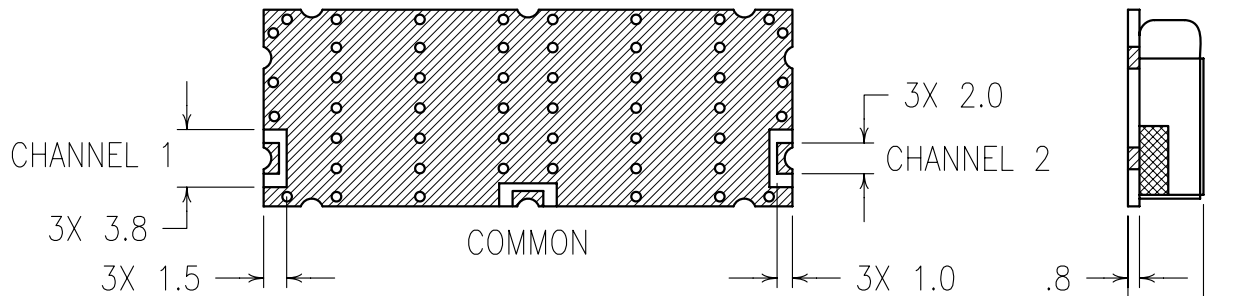

BOTTOM VIEW

END VIEW

COPPER



NOTES:

ENGLISH / METRIC METRIC TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 OR BETTER REMOVE ALL BURRS ENGLISH (INCHES) XX ± .02 .XXX ± .01 METRIC (MM) X ± .25 XX ± .13 ANGLES ± 0° 30'	CHECKED BY						
	DRAWN BY	PBF					
	ENGINEER	MJG	II	28FEB97	MJG	DEV.	INT. ISS. PER 0208
	SCALE	2:1	REV	DATE	BY	DCN No.	REMARKS
	DATE	APPLIC: COAXIAL FILTER TITLE: 8DCR4B-2315/2385/30-L				SHEET NO/DF	
	05MAR97					1	1
	Material: N/A	DRAWING No.				□L0023	
	Finish: N/A						

