


2

1



ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 1015 MHz
 PASSBAND: 720-1310 MHz
 P.B. PHASE MATCHING: 10 DEGREES MAX
 P.B. INSERTION LOSS: 2.5 dB MAX
 1 dB BANDWIDTH: 590 MHz MIN
 RETURN LOSS: 1.5:1
 REJECTION:
 40 dBc MIN @ 625 MHz
 40 dBc MIN @ 1700 MHz

B

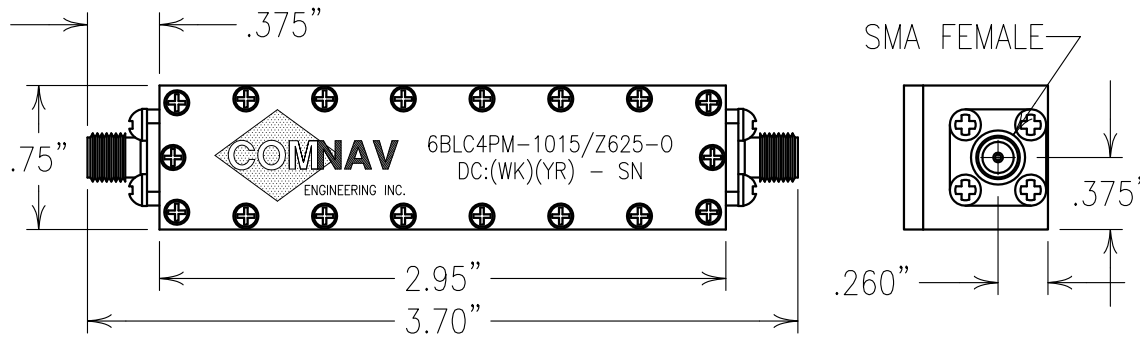

COPY

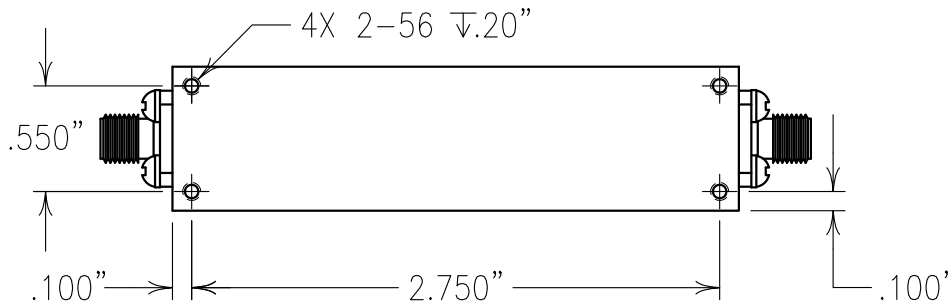

NOTES:
 FILTERS TO BE PHASE MATCHED IN SETS OF FIVE.
 FILTERS ARE MATCHED IN SET SIZES GIVEN ON PURCHASE ORDER.

ENGLISH / METRIC ENGLISH	CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY	A	10JUN09	KJR	DEV.	GEN. REV. PER 3076
MACHINED SURFACES TO BE 125 / OR BETTER	ENGINEER	II	25NOV08	KJR	DEV.	INI. ISS. PER 2981
REMOVE ALL BURRS	KJR	REV	DATE	BY	DCN No.	REMARKS
ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC: CHIP AND WIRE FILTER			
.XX ±.02	.X ±.2	2:1				
.XXX ±.01	.XX ±.13	DATE	TITLE: 6BLC4PM-1015/Z625-0		SHEET OF 1 1	
ANGLES ± 0° 30'	10JUN09					

A

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



MATERIAL: ALUMINUM
 FINISH: SILVER

DRAWING No.
 0L0968