
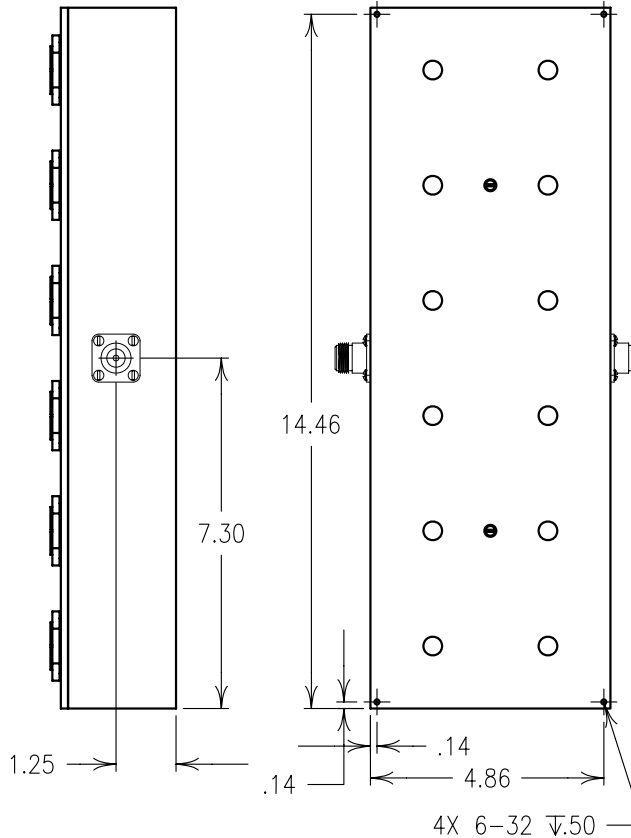


2


1

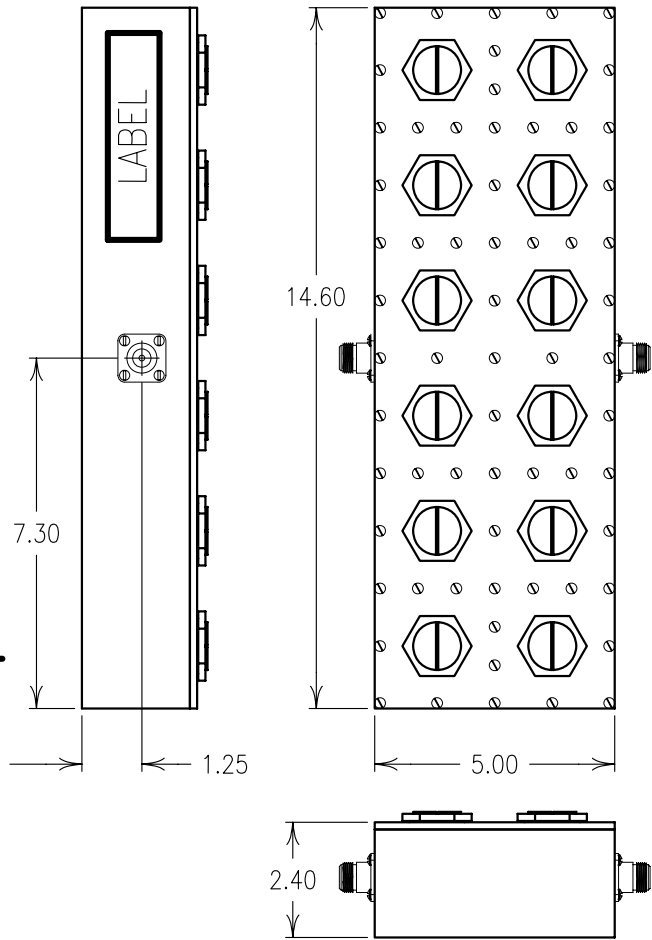

ELECTRICAL CHARACTERISTICS	
3.0 dB BANDWIDTHS	2315-2319.3 & 2345.7-2350 MHz MIN
INSERTION LOSS @fos	<1.0 dB
VSWR	1.6:1 MAX
30 dB REJECTION	DC-2314 MHz 2320-2345 MHz 2351-3000 MHz

**COPY**

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



NOTES:  
LABEL CONTAINS COMNAV PART #,  
REVISION LEVEL AND DATE CODE.

ENGLISH / METRIC ENGLISH	CHECKED BY	B	08JUN98	MJG	DEV.	GEN. REV. PER 0609	
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY	A	13MAY98	MJG	DEV.	GEN. REV. PER 0574	
	ENGINEER	II	24APR98	MJG	DEV.	INIT. ISS. PER 0568	
ENGLISH (INCHES) .XX ±.02 .XXX ±.01	SCALE	1:4	DATE	10JUN98	APPLIC:	COAXIAL FILTER	
METRIC (MM) .X ±.25 .XX ±.13	TITLE:	12BCVSP-2317/2348/C4.3-N				SHEET NO/OF	1 / 1
ANGLES ± 0° 30'	MATERIALS:	6061-T6 ALUMINUM				DRAWING No.	0L0107
COMNAV ENGINEERING INC.	FINISH:	FLAT BLACK					