


2

1

ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY:	1472 MHz
3 dB BANDWIDTH:	75 MHz NOM.
PASSBAND:	1451-1493 MHz
PASSBAND LOSS:	<2.0 dB
PASSBAND VSWR:	<1.5:1
45 dB REJECTION:	DC-1212, 1732 MHz

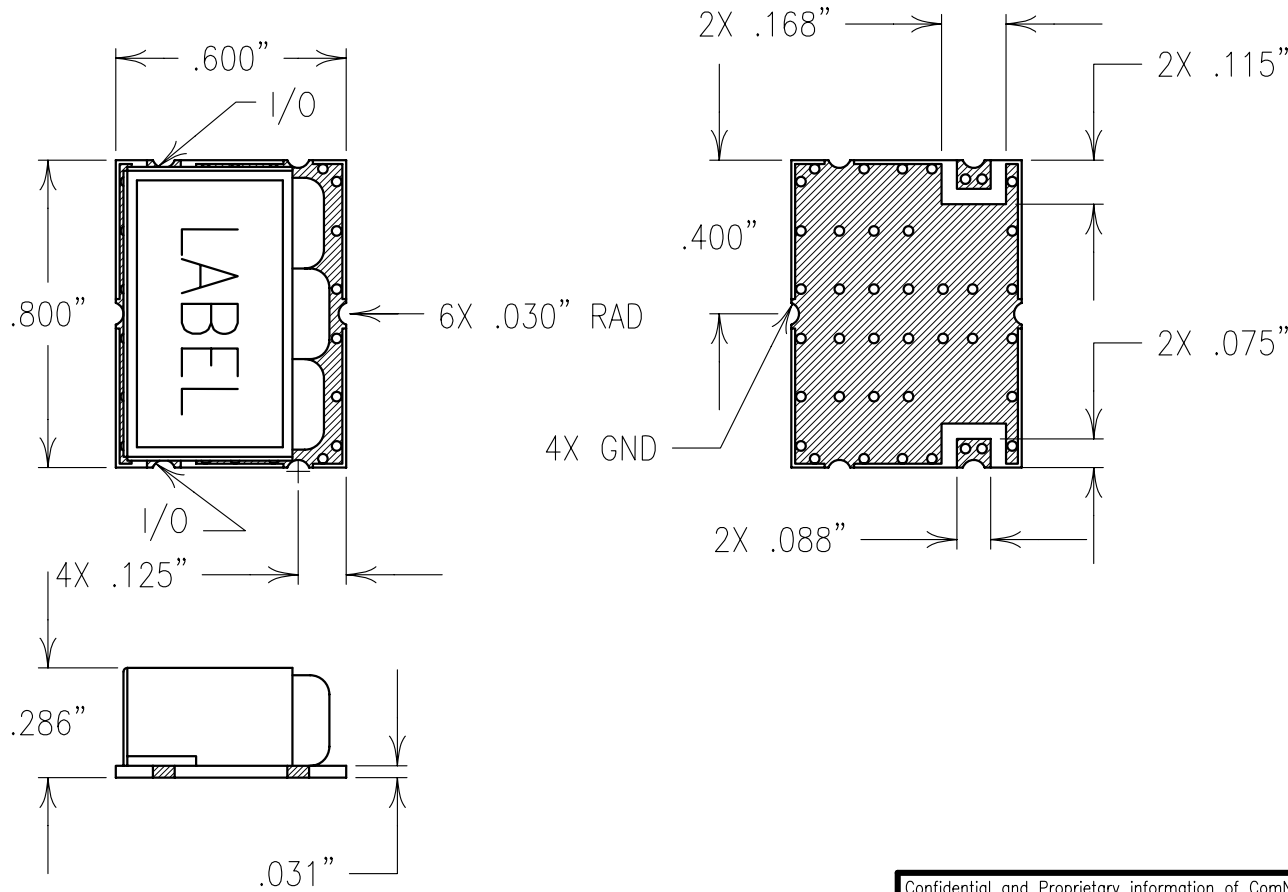

COPY

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC ENGLISH	CHECKED BY	C	14JUL05	PBF	DEV.	GEN. REV. PER 2405
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY	B	09JUL01	RME	DEV.	GEN. REV. PER 1705
MACHINED SURFACES TO BE 125 / OR BETTER	ENGINEER	A	18MAY98	PBF	DEV.	GEN. REV. PER 0580
REMOVE ALL BURRS	REV	DATE	BY	DCN No.	REMARKS	

ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC:
.XX ±.02	.X ±.25	2:1	CERAMIC COAXIAL FILTER
.XXX ±.010	.XX ±.13	DATE	TITLE:
ANGLES ± 0° 30'		18JUL05	3BCR6C-1472/75-L

	FINISH:	BOARD: NI/AU PLATED COPPER	DRAWING No.	SHEET OF 1 1
		JACKET: NI/SILVER RESONATOR: SILVER	OL0110	

NOTES:

FOR RECOMMENDED FOOTPRINT SEE FP0028.

RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY OR REFLOW NOT TO EXCEED AS INDICATED BELOW:

TEMP.(°C) MAX.TIME(SEC)

215	90
230	60
245	30
260	15