

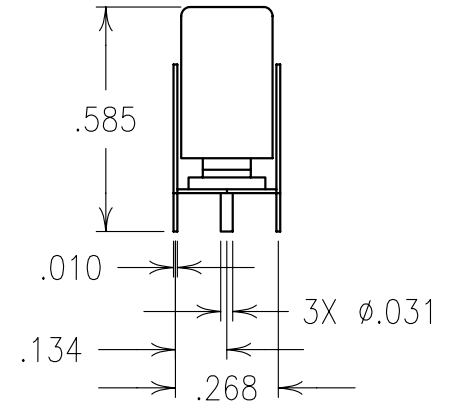


2

1

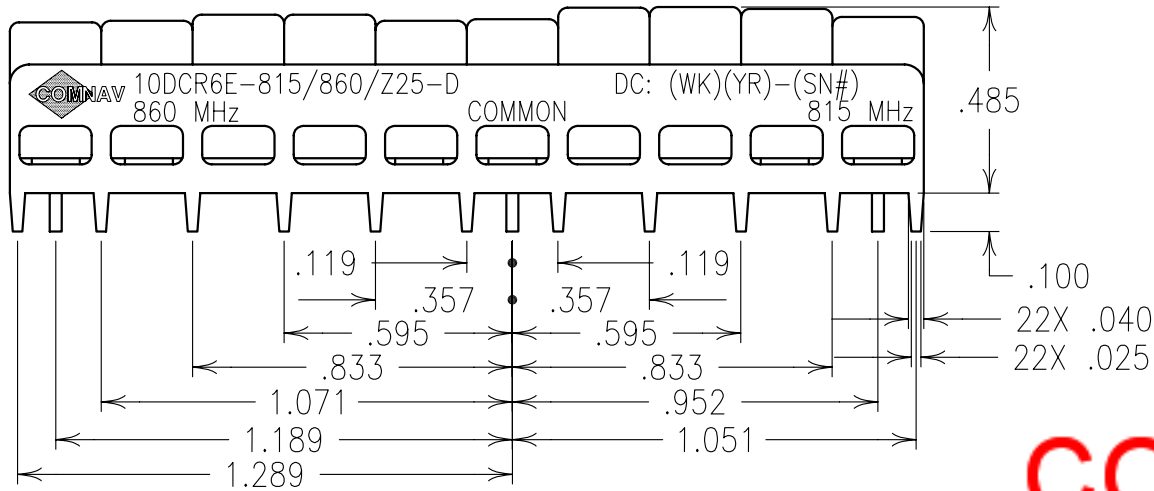


COPY

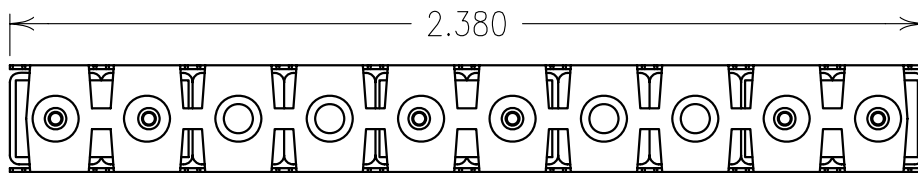

ELECTRICAL CHARACTERISTICS		
CENTER FREQUENCY	815 MHz CHAN.	860 MHz CHAN.
PASSBAND	806-824 MHz	851-869 MHz
PASSBAND LOSS	<3.0 dB	<3.0 dB
PASSBAND VSWR	<1.7:1	<1.7:1
60 dB REJECTION	851-869 MHz	806-824 MHz
IN/OUT IMPEDANCE	50 OHMS	50 OHMS

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



NOTES:
 HAND OR WAVE SOLDERING.
 MAX REFLOW TEMP. 240°C FOR 30 SEC.,
 OR 260°C FOR 15 SEC.

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 OR BETTER REMOVE ALL BURRS	DRAWN BY PBF				
ENGLISH (INCHES) .XX ±.02 .XXX ±.01	ENGINEER MJG	II	02AUG99	MJG	DEV.
METRIC (MM) .X ±.25 .XX ±.13	REV		DATE	BY	DCN No.
ANGLES ± 0° 30'	SCALE 2:1	APPLIC: COAXIAL FILTER			
	DATE 10AUG99	TITLE: 10DCR6E-815/860/Z25-D			SHEET NO/OF 1 1
	FINISH: BOARD: TINPLATED COPPER JACKET: NI/SILVER RESONATOR: SILVER			DRAWING No. 010204	