


ELECTRICAL SPECIFICATIONS

CENTER FREQUENCY	928.5 MHz
3 dB BANDWIDTH	5 MHz MAX
PASSBAND	2 MHz MIN
PASSBAND LOSS	≤ 4.0 dB MAX
REJECTION:	±7.5 MHz
60 dB	fo ± 30 MHz
ULTIMATE	> 80 dB
VSWR	≤ 1.5:1
OPERATING TEMP.	-40 TO 85C
IMPEDANCE	50 OHMS

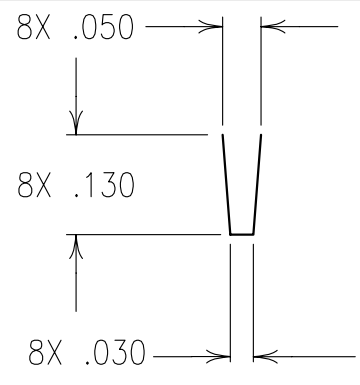

DETAIL A
SCALE 4:1

COPY

- NOTES:
- 1) DC: IS ON ONE SIDE ONLY.
 - 2) FOR RECOMMENDED FOOTPRINT SEE FPO021.

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC ENGLISH	CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY	A	01DEC00	KJR	DEV.	GEN. REV. PER 1430
MACHINED SURFACES TO BE 125 OR BETTER REMOVE ALL BURRS	ENGINEER	II	13SEP00	KJR	DEV.	INI. ISS. PER 1312
ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC:	CERAMIC COAXIAL FILTER		
.XX ±.02	.X ±.25	2:1	DATE	TITLE: 3BCR12C-929/5-D		
.XXX ±.010	.XX ±.13	27DEC00	MATERIAL:	N/A		DRAWING No. 0L0282
ANGLES ± 0° 30'	FINISH:	N/A		SHEET OF 1 1		