

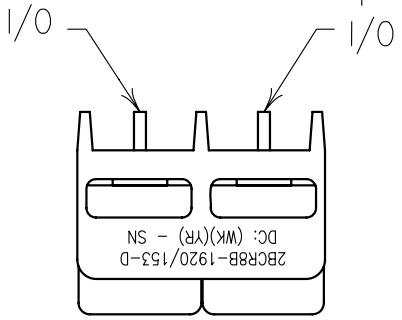


ELECTRICAL SPECIFICATIONS	
CENTER FREQ.	1920 MHz
3dB BANDWIDTH	150 MHz MIN.
LOSS @ fo:	<0.5 dB
VSWR	1.5:1 TYP.
2.0 dB FLATNESS	1850-1990 MHz
REJECTION:	
65 dB _a	4000 MHz
POWER HANDLING	5 WATTS




COPY

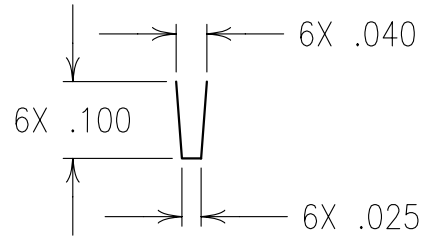

DETAIL A
SCALE 4:1

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



NOTES:
1) DC: IS ON ONE SIDE ONLY.
FOR RECOMMENDED FOOTPRINT SEE FPO026.

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY RME				
ENGLISH (INCHES) .XX ±.02 .XXX ±.010	ENGINEER KJR	II	22NOV00	KJR	DEV.
METRIC (MM) .X ±.25 .XX ±.13	SCALE 2:1	REV	DATE	BY	DCN No.
ANGLES ± 0° 30'	DATE 12DEC00	APPLIC: CERAMIC COAXIAL FILTER			
COMNAV ENGINEERING INC.	MATERIAL: N/A	TITLE: 2BCR8B-1920/153-D			SHEET NO/OF 1 1
	FINISH: N/A	DRAWING No. 0L0291			

A

B