

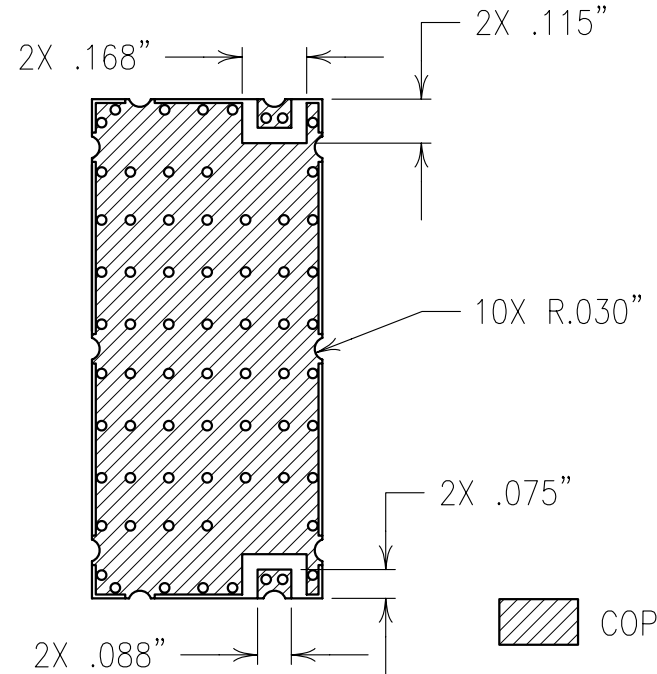
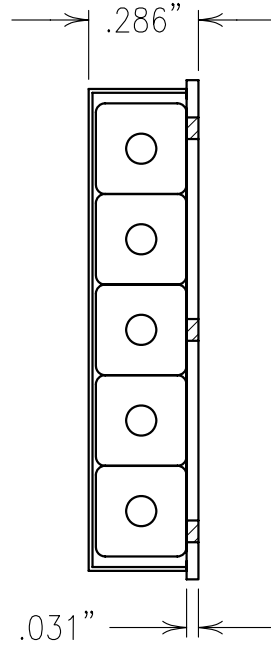


COPY

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY	1795 MHz
3 dB BANDWIDTH	35 MHz NOM
PASSBAND	1785-1805 MHz
PASSBAND LOSS	< 2.5 dB
PASSBAND FLATNESS	< 1.0 dB
REJECTION:	
30 dB	1820 -> ~3* fo

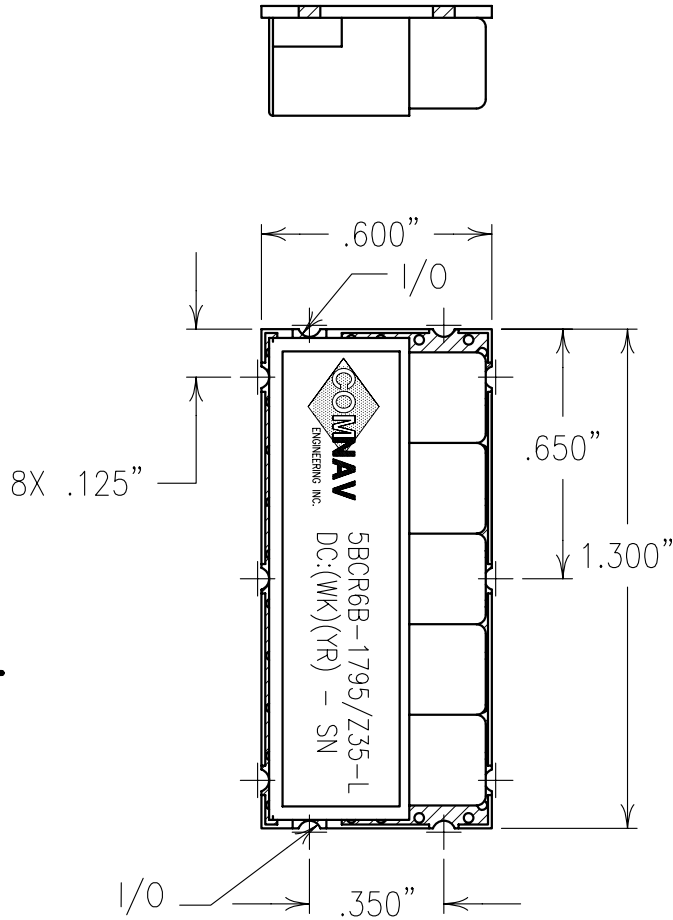

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



NOTES:
 FOR RECOMMENDED FOOTPRINT SEE FP0014.
 RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY
 OR REFLOW NOT TO EXCEED AS INDICATED BELOW:

TEMP.(°C) MAX.TIME(SEC)

215	90
230	60
245	30
260	15

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125/ OR BETTER REMOVE ALL BURRS	DRAWN BY				
	RME				
	II	30JAN01	KJR	DEV.	
	REV	DATE	BY	DCN No.	
				INI. ISS. PER 1524	
				REMARKS	
ENGLISH (INCHES) .XX ±.02 .XXX ±.01	METRIC (MM) .X ±.25 .XX ±.13	SCALE 2:1	APPLIC: CERAMIC COAXIAL FILTER		
ANGLES ± 0° 30'		DATE 09FEB01	TITLE: 5BCR6B-1795/Z35-L		
FINISH: BOARD: TINPLATED COPPER JACKET: NI/SILVER RESONATOR: SILVER				DRAWING No. 010303	SHEET/OF 1/1