
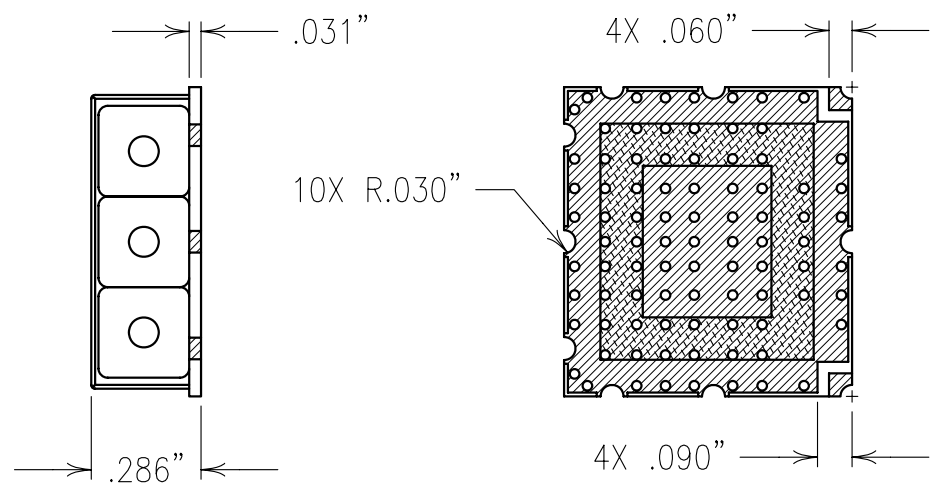


2

1

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY	584 MHz
3 dB BANDWIDTH	15 MHz NOM.
PASSBAND	fo ±4.0
PASSBAND FLATNESS	<0.5 dB
PASSBAND VSWR	1.7:1 TYP
REJECTION:	
50 dBc	fo ±100 MHz

**COPY**

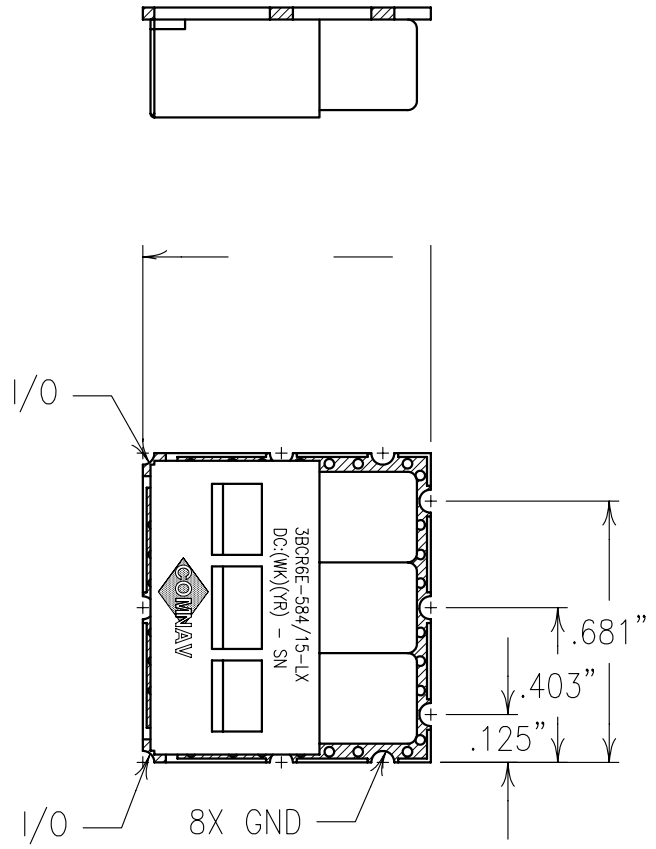

SOLDER MASK

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:  
 FOR RECOMMENDED FOOTPRINT SEE FP0055.  
 FOR SOLDER MASKING SEE SM0013.  
 RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY  
 OR REFLOW NOT TO EXCEED AS INDICATED BELOW:  
 TEMP.(°C) MAX.TIME(SEC)

215	90
230	60
245	30
260	15

TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125/ OR BETTER REMOVE ALL BURRS	CHECKED BY	B	10SEP01	MJG	DEV.	GEN. REV. PER 1721
	ENGINEER	A	21AUG01	SWB	DEV.	GEN. REV. PER 1703
		II	08AUG01	MJG	DEV.	INI. ISS. PER 1694
	DATE					
	FINISH:	BOARD: NI/AU PLATED COPPER JACKET: NI/SILVER RESONATOR: SILVER				