


2


1

ELECTRICAL CHARACTERISTICS	
3dB CUTOFF FREQ.	128 MHz
LOSS @ 0.9 CUTOFF	<1.0 dB
40 dB REJECTION	135-1000 MHz
VSWR	1.7:1

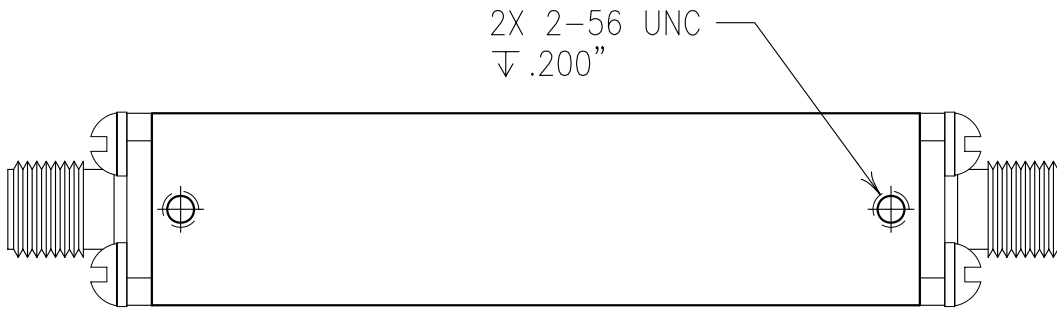


BOTTOM VIEW

COPY

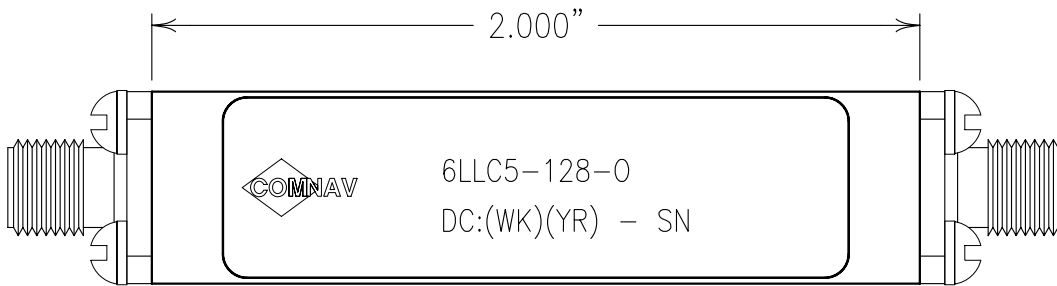

TOP VIEW



Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:

BOTH CONNECTORS ARE SMA.
COMNAV PART# AND DATE CODE ARE ETCHED ON LID.

ENGLISH / METRIC ENGLISH	CHECKED BY						
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY	A	08JAN02	MJG	DEV.	GEN. REV. PER 1817	
MACHINED SURFACES TO BE 125 / OR BETTER	ENGINEER	II	04OCT01	MJG	DEV.	INI. ISS. PER 1744	
REMOVE ALL BURRS	ENGINEER	REV	DATE	BY	DCN No.	REMARKS	
ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC: CHIP & WIRE FILTER				
.XX ±.02	.X ±.25	2:1	TITLE: 6LLC5-128-0				
.XXX ±.010	.XX ±.13	DATE	29JAN02				
ANGLES ± 0° 30'							
	MATERIAL:	N/A				DRAWING No.	0L0361
	FINISH:	N/A					
						SHEET OF	1 1