

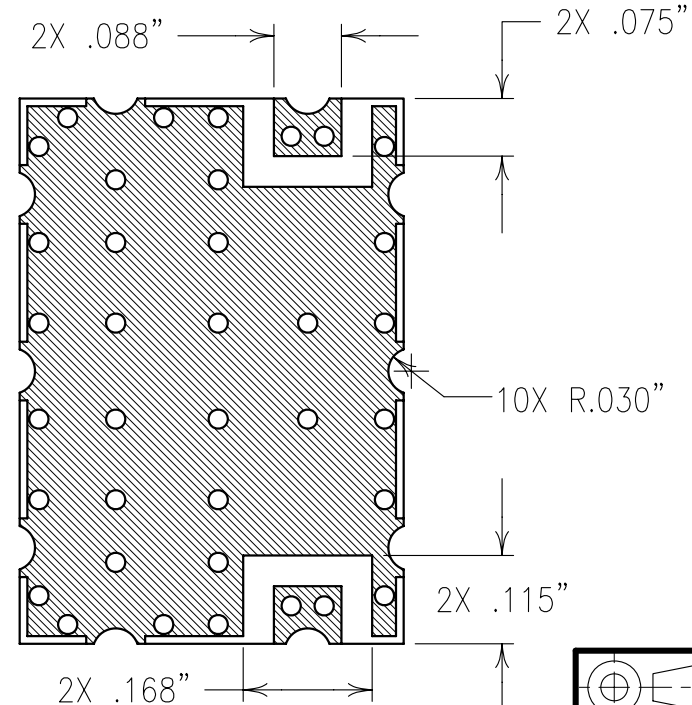
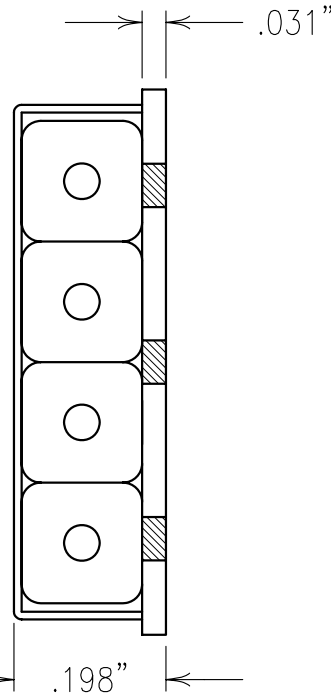
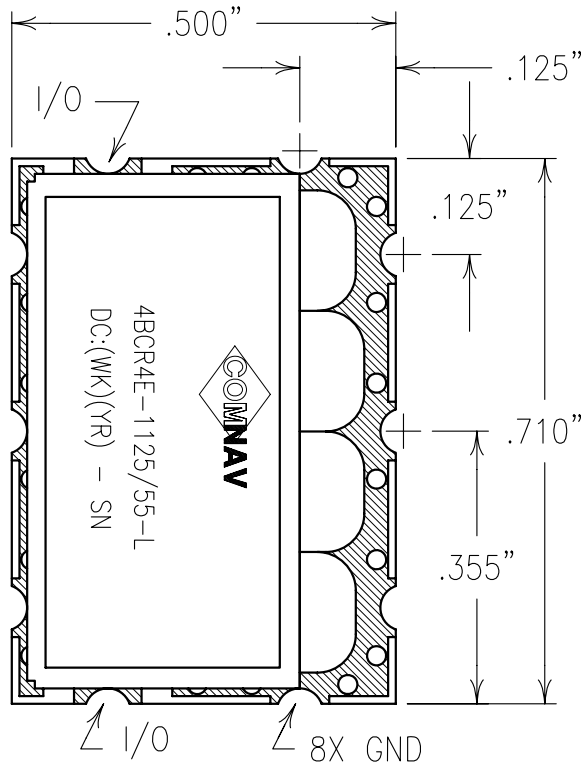


ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY	1125 MHz
3 dB BANDWIDTH	55 MHz MIN
LOSS @ fo	< 2.0 dB
VSWR	<1.7:1 MAX
PHASE LINEARITY	27 DEG pk-pk
REJECTION @ 975 MHz	50 dB MIN

**COPY**

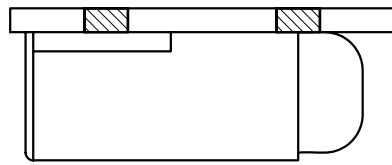

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:

FOR RECOMMENDED FOOTPRINT SEE FP0010.  
 RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY  
 OR REFLOW NOT TO EXCEED AS INDICATED BELOW:

TEMP.(°C)	MAX. TIME(SEC)
215	90
230	60
245	30
260	15

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125/100 OR BETTER REMOVE ALL BURRS	DRAWN BY RME				
ENGLISH (INCHES) .XX ±.02 .XXX ±.010 ANGLES ± 0° 30'	ENGINEER MJG	II	11DEC01	MJG	DEV.
	SCALE 4:1	REV	DATE	BY	DCN No.
	DATE 12DEC01	APPLIC: CERAMIC COAXIAL FILTER			
		TITLE: 4BCR4E-1125/55-L			
	FINISH: BOARD: NI/AU PLATED COPPER JACKET: NI/SILVER RESONATOR: SILVER	DRAWING No. 0L0380			SHEET OF 1 1