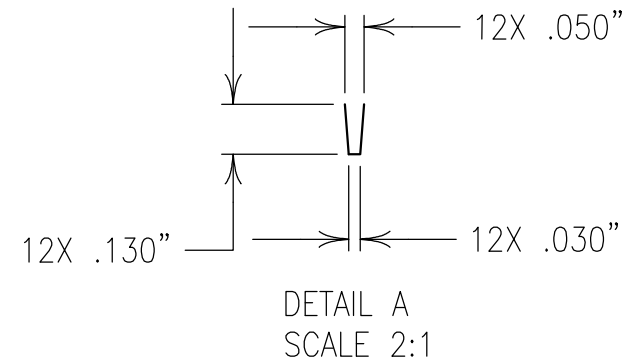
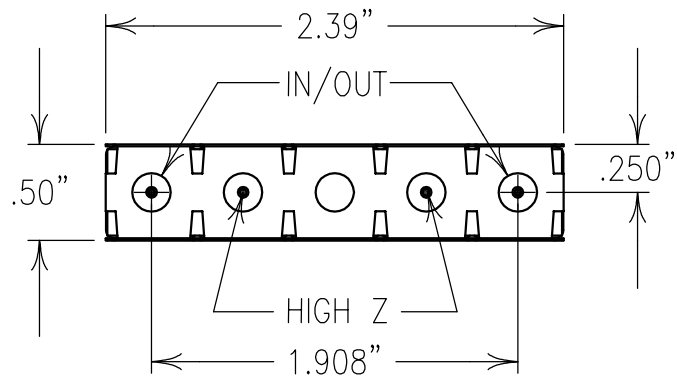
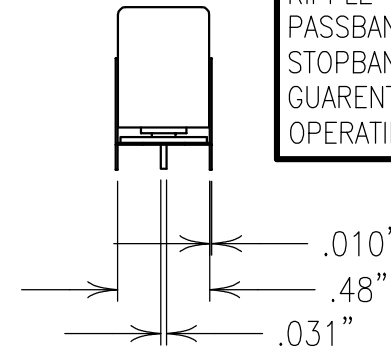
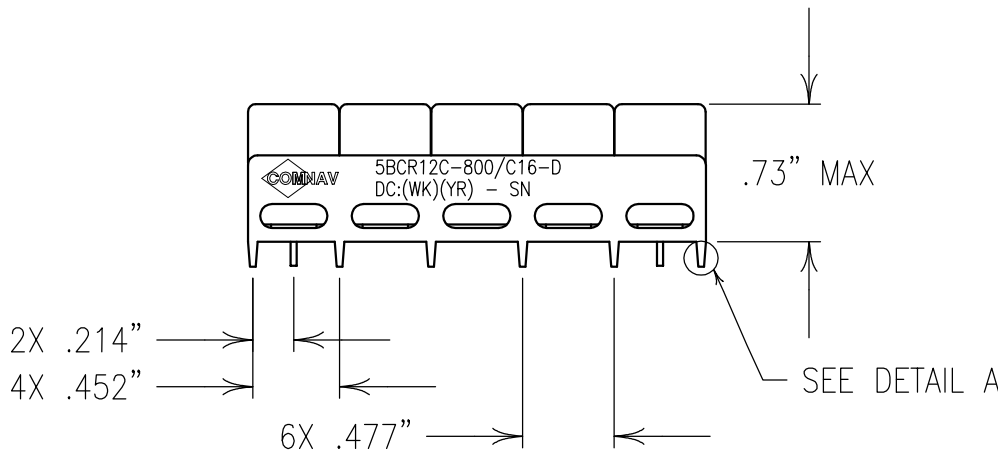


ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY	800 MHz
PASSBAND FREQ.	794-806 MHz
PASSBAND ATTN.	<1.5 dB
RIPPLE	<0.7 dB
PASSBAND VSWR	1.5:1 MAX.
STOPBAND ATTN.	>50 dB @ 776 MHz
GUARENTEED ATTN.	>80 dB @ 666 MHz
OPERATING TEMP.	-30° TO +70°C





**COPY**

NOTES:

DC: IS ON ONE SIDE ONLY.

PART MAY BE EXPOSED TO 240°C FOR 30 SEC.,  
OR 260°C FOR 15 SEC.  
FOR BEST RESULTS HAND OR WAVE SOLDERING IS SUGGESTED.

FOR RECOMMENDED FOOTPRINT SEE FP0076.

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.					
ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY	A	28NOV07	EJG	DEV. GEN. REV. PER 2788
MACHINED SURFACES TO BE 125 / OR BETTER	ENGINEER	II	21FEB02	MJG	DEV. INI. ISS. PER 1856
REMOVE ALL BURRS	REV		DATE	BY	DCN No. REMARKS
ENGLISH (INCHES) .XX ±.02 .XXX ±.010	METRIC (MM) .X ±.50 .XX ±.25	SCALE	APPLIC: CERAMIC COAXIAL FILTER		
ANGLES ± 0° 30'	DATE	28NOV07	TITLE: 5BCR12C-800/C16-D		
	FINISH:	JACKET: NI/SILVER RESONATOR: SILVER PINS: TIN PLATED		DRAWING No.	0L0396
				SHEET OF	1 1