


ELECTRICAL CHARACTERISTICS

AMPS/PCS PORT: PASSBAND: 800-1990 MHz 30 dB REJECTION: 2400-2483 MHz 5150-5825 MHz	2.4 GHz ISM PORT: PASSBAND: 2400-2483 MHz 30 dB REJECTION: 800-1990 MHz 5150-5825 MHz	5 GHz PORT: PASSBAND: 5150-5825 MHz 30 dB REJECTION: 800-1990 MHz 2400-2483 MHz
---	--	--

COMMON SPECS.

PASSBAND LOSS:	<2.0 dB
PASSBAND VSWR:	<2.0:1
PASSBAND FLATNESS:	<1.0 dB

COPY

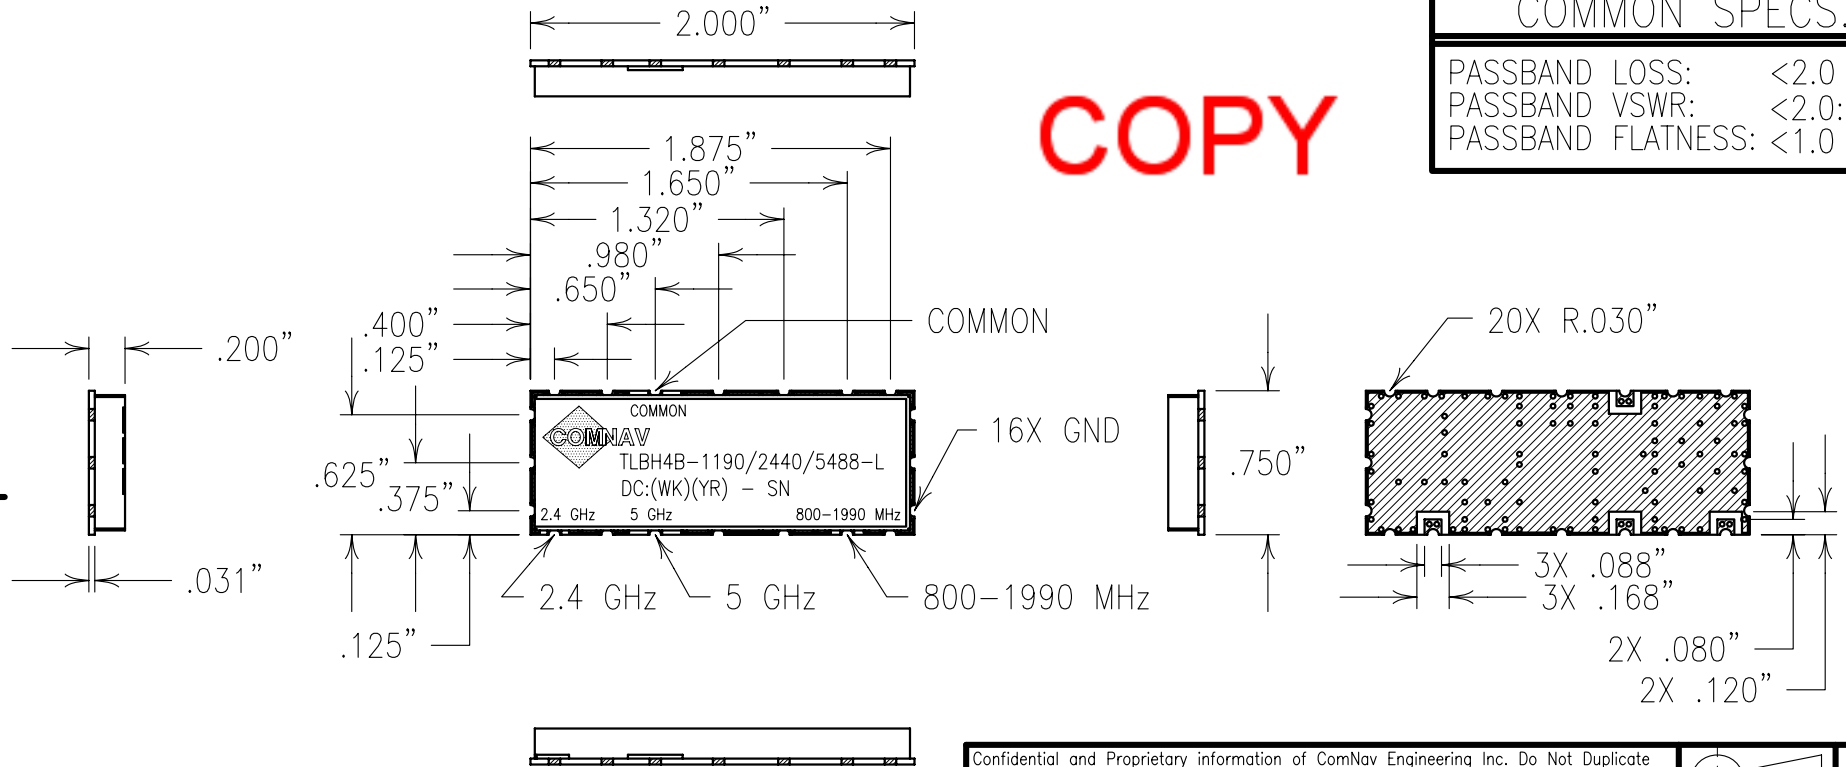

NOTES:

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY				
MACHINED SURFACES TO BE 125 OR BETTER	ENGINEER	II	23AUG02	MJG	DEV.
REMOVE ALL BURRS	ENGINEER	REV	DATE	BY	DCN No.
	MJG				REMARKS

ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC:
.XX ±.02	.X ±.25	1:1	CERAMIC COAXIAL FILTER
.XXX ±.010	.XX ±.13	DATE	TITLE:
ANGLES ± 0° 30'		12SEP02	TLBH4B-1190/2442/5488-L

	FINISH: JACKET: NI/SILVER	DRAWING No.	SHEET OF 1 1
	RESONATOR: SILVER	0L0426	
	BOARD: NICKEL/GOLD		