
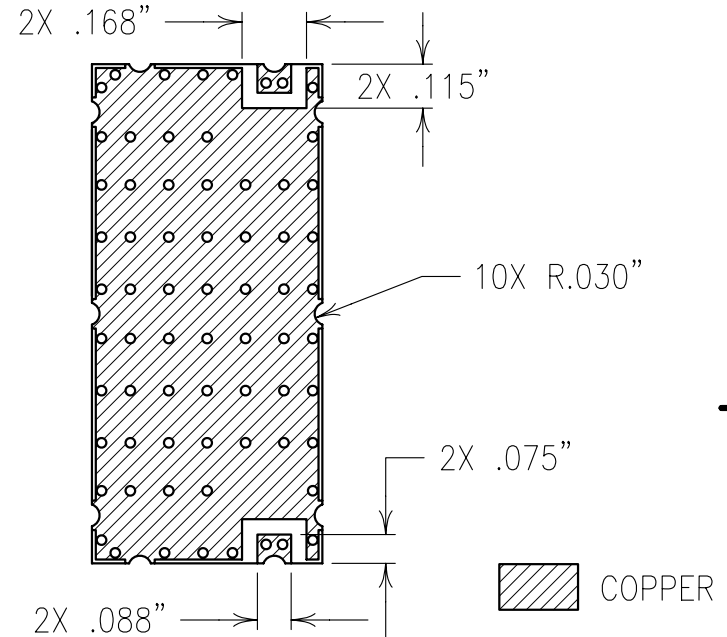
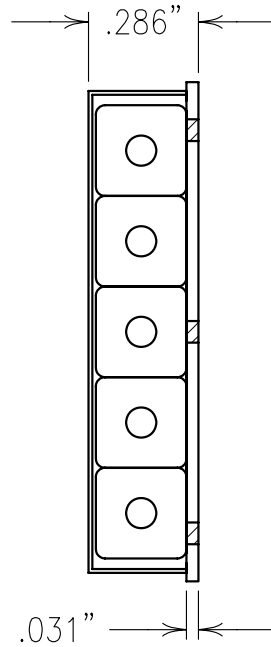


2


1

COPY

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	1780 MHz
3 dB BANDWIDTH:	30 MHz -0/+10%
LOSS @ FO:	<3.0 dB
VSWR:	1.7:1 TYP
30 dB BANDWIDTH:	60 MHz

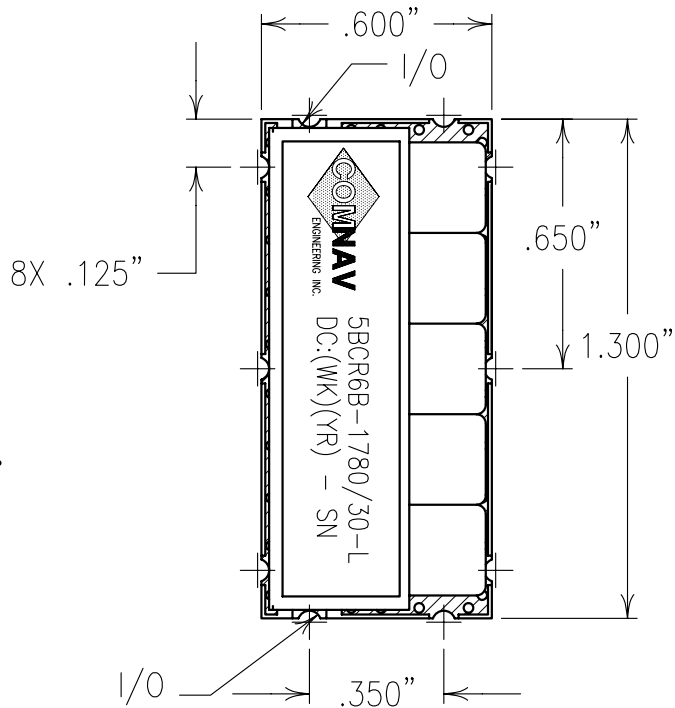

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



NOTES:

FOR RECOMMENDED FOOTPRINT SEE FP0014.
 RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY
 OR REFLOW NOT TO EXCEED AS INDICATED BELOW:

TEMP.(°C)	MAX.TIME(SEC)
215	90
230	60
245	30
260	15

ENGLISH / METRIC ENGLISH	CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125/ OR BETTER REMOVE ALL BURRS	DRAWN BY					
	PBF	II	16JUN03	MJG	DEV.	INI. ISS. PER 2087
	ENGINEER	REV	DATE	BY	DCN No.	REMARKS
ENGLISH (INCHES) .XX ±.02 .XXX ±.01	METRIC (MM) .X ±.25 .XX ±.13	SCALE	APPLIC: CERAMIC COAXIAL FILTER			
ANGLES ± 0° 30'	DATE	TITLE: 5BCR6B-1780/30-L				
	FINISH: BOARD: NI/AU JACKET: NI/SILVER RESONATOR: SILVER	DRAWING No.		SHEET/OF		
		0L0472		1 / 1		