


COPY

ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY:	1130 MHz
FLAT BANDWIDTH:	45 MHz
1.2 dB BANDWIDTH:	51 MHz
3 dB BANDWIDTH:	58 MHz
VSWR (1110-1150 MHz):	<1.2:1
REJECTION @ 1091 MHz:	>15 dB

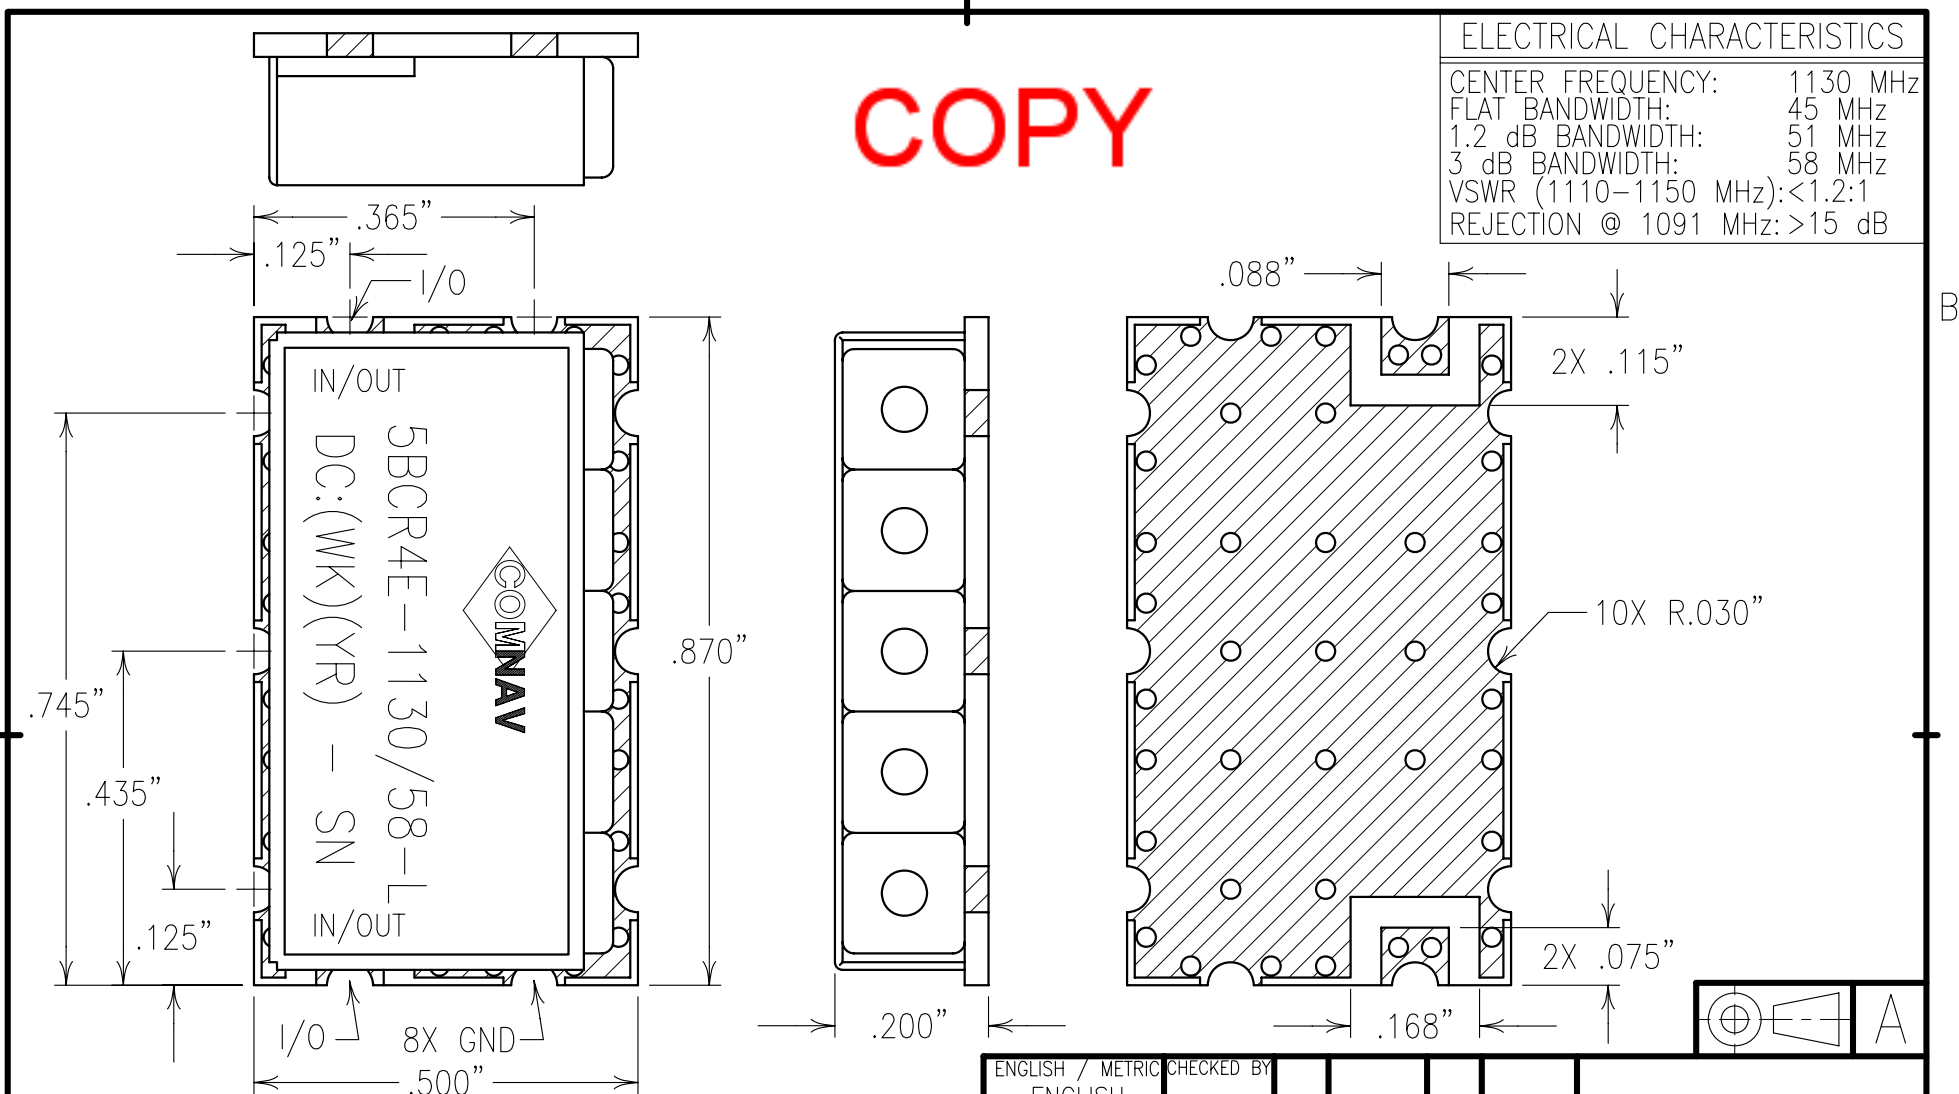

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:

RECOMMENDED ATTACHMENT METHOD:	TEMP.(°C)	MAX. TIME(SEC)
SILVER EPOXY OR REFLOW NOT TO EXCEED AS INDICATED:	215	90
	230	60
	245	30
	260	15

ENGLISH / METRIC ENGLISH		CHECKED BY			
TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY			
MACHINED SURFACES TO BE 125 / OR BETTER		PBF			
REMOVE ALL BURRS		ENGINEER			
		MJC			
		REV	DATE	BY	DCN No.
		II	29OCT03	MJC	DEV.
					INI. ISS. PER 2132
					REMARKS
		APPLIC: CERAMIC COAXIAL FILTER			
		TITLE: 5BCR4E-1130/58-L			
		SCALE 4:1			
		DATE 04NOV03			
		FINISH: BOARD: NI/AU PLATED COPPER		DRAWING No.	
		JACKET: NI/SILVER		0L0495	
		RESONATOR: SILVER		SHEET OF 1 1	