



2


1

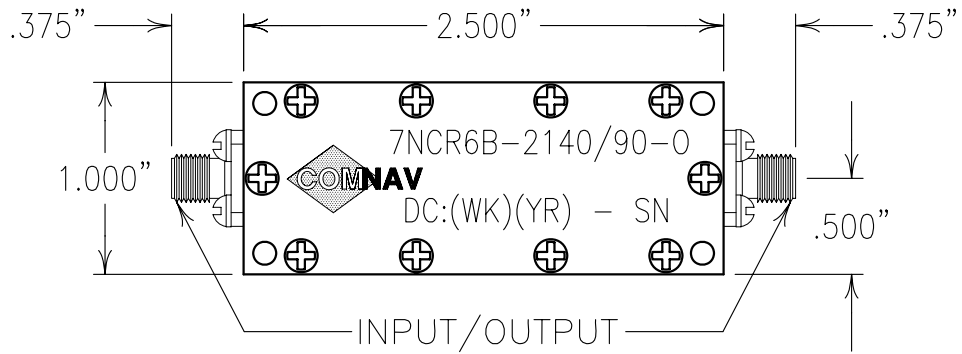

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	2140 MHz
3 dB BANDWIDTH:	90 MHz NOM
PASSBANDS:	DC - 1920 MHz 2400-4000 MHz
PASSBAND LOSS:	<1.0 dB
PASSBAND VSWR:	<1.7:1
40 dBc REJECTION:	2110-2170 MHz

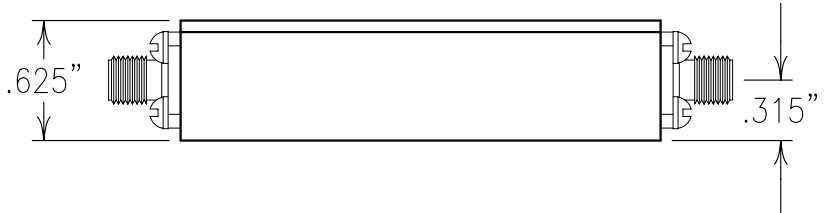

COPY

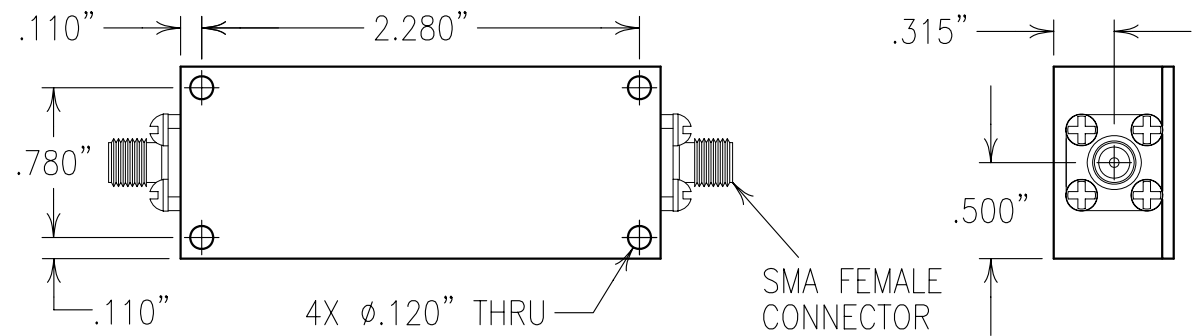

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY PBF				
	ENGINEER MJG	II	10MAR04	MJG	DEV.
		REV	DATE	BY	DCN No.
					REMARKS
ENGLISH (INCHES) .XX ±.01 .XXX ±.005	METRIC (MM) .X ±.2 .XX ±.13	SCALE 1:1	APPLIC: CERAMIC COAXIAL FILTER		
ANGLES ± 0° 30'	DATE 15MAR04	TITLE: 7NCR6B-2140/90-0			
COMNAV ENGINEERING INC	MATERIAL: COVER: ALUMINUM BASE: ALUMINUM	DRAWING No.		SHEET OF	
	FINISH: COVER: NICKEL PLATE BASE: NICKEL PLATE	0L0530		1 1	