



2




1

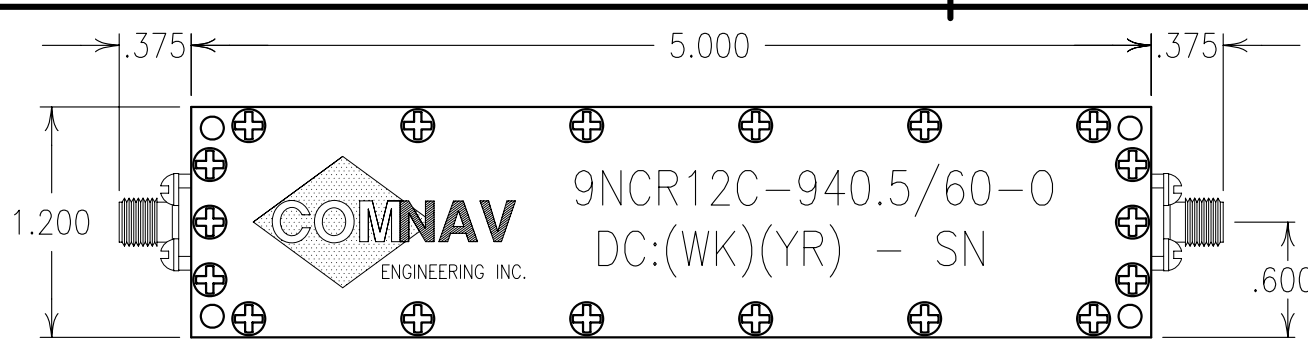

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	940.5 MHz
3 dB BANDWIDTH:	60 MHz NOM
PASSBAND:	DC-870, 990-1500 MHz
PASSBAND LOSS:	<1.0 dB
PASSBAND VSWR:	<1.7:1
40 dBc REJECTION:	921-960 MHz

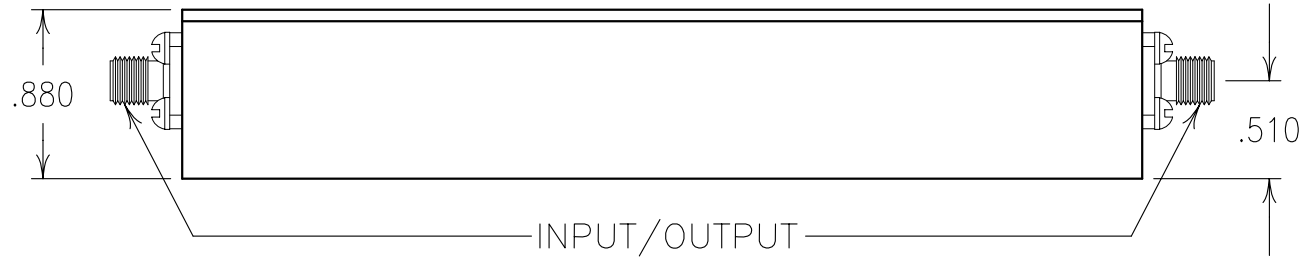

**COPY**

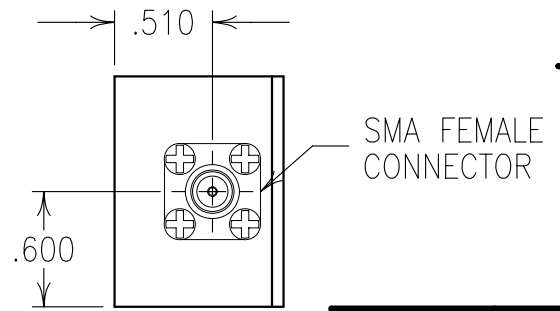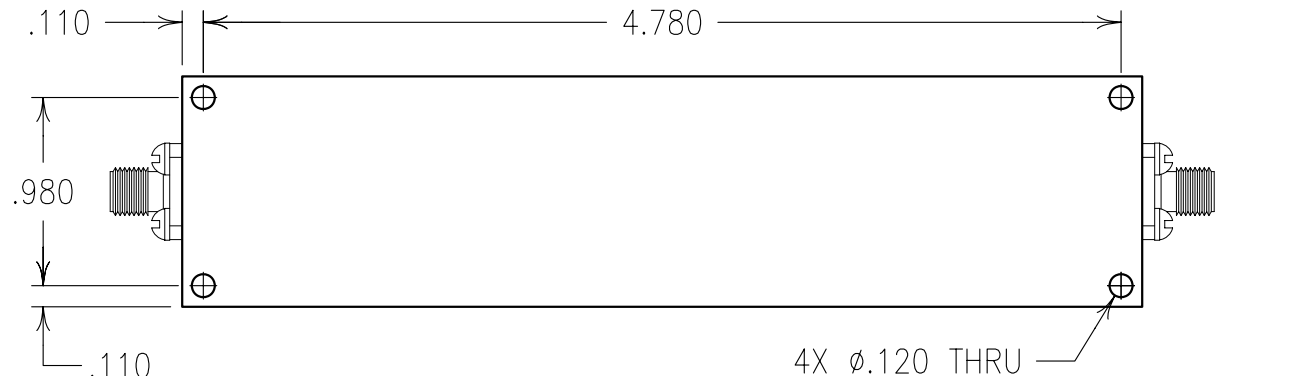

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY PBF				
	ENGINEER MJG	II	10MAR04	MJG	DEV. INI. ISS. PER 2210
	REV	DATE	BY	DCN No.	REMARKS
ENGLISH (INCHES) .XX ±.01 .XXX ±.005	METRIC (MM) .X ±.2 .XX ±.13	SCALE 1:1	APPLIC: CERAMIC COAXIAL FILTER		
ANGLES ± 0° 30'	DATE 08APR04	TITLE: 9NCR12C-940.5/60-0			
COMNAV ENGINEERING INC.	MATERIAL: COVER: ALUMINUM BASE: ALUMINUM			DRAWING No.	
	FINISH: COVER: NICKEL PLATE BASE: NICKEL PLATE			0L0535	
				SHEET OF 1 1	