




2

1

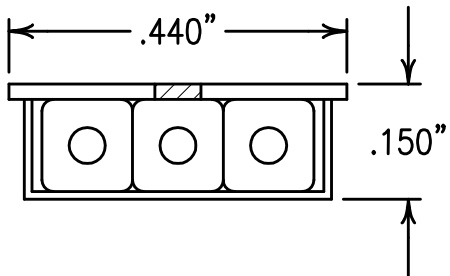

COPY

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	1350 MHz
3 dB BANDWIDTH:	20 MHz MIN
LOSS @ FO:	<4.0 dB
VSWR:	1.7:1
30 dBc REJECTION:	FO ±40 MHz

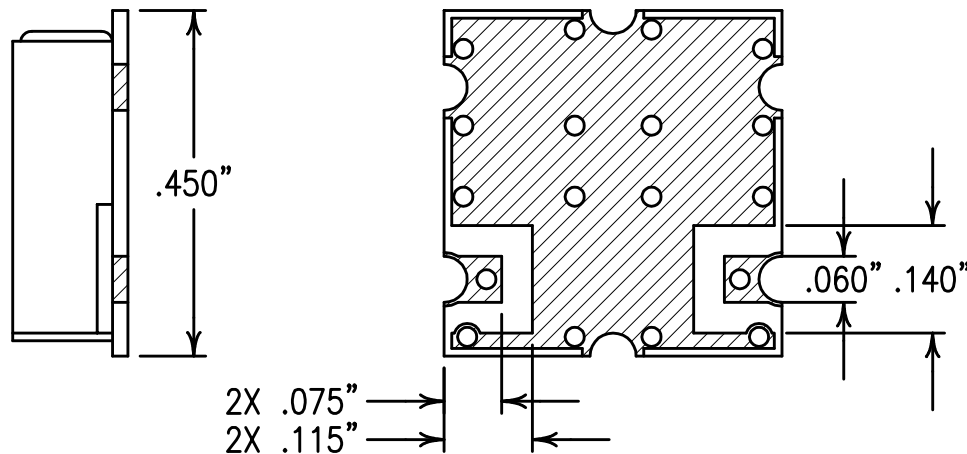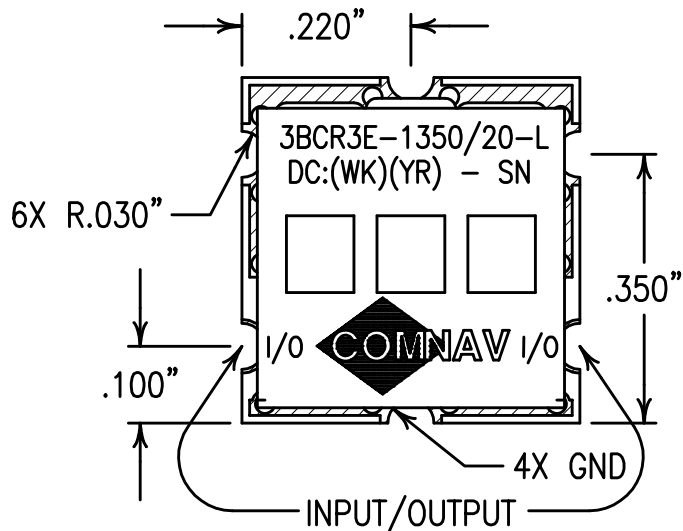

NOTES:

RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY
 OR REFLOW NOT TO EXCEED AS INDICATED BELOW:

TEMP.(°C) MAX.TIME(SEC)

215	90
230	60
245	30
260	15

RECOMMENDED FOOTPRINT: FP0093.

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.				A	
ENGLISH / METRIC ENGLISH		CHECKED BY			
TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY			
MACHINED SURFACES TO BE 125 OR BETTER		PBF			
REMOVE ALL BURRS		ENGINEER		II 16JUN04 MJG DEV. INI. ISS. PER 2258	
		M/JG		REV DATE BY DCN No. REMARKS	
ENGLISH (INCHES)	METRIC (MM)	SCALE		APPLIC: CERAMIC COAXIAL FILTER	
.XX ±.02	.X ±.5	4:1		TITLE: 3BCR3E-1350/20-L	
.XXX ±.010	.XX ±.25	DATE			
ANGLES ± 0° 30'		18JUN04		DRAWING No. 0L0546	
		FINISH: BOARD: NI/AU PLATED COPPER JACKET: NI/SILVER RESONATOR: SILVER		SHEET OF 1 1	