




2

1


ELECTRICAL CHARACTERISTICS

PASSBAND:	DC-741.2 MHz 758.6-950 MHz
PASSBAND INSERTION LOSS:	<3.0 dBa
RETURN LOSS:	<10 dB TYPICAL
REJECTION:	MIN. 50 dBc @ 750±1.0 MHz

COPY

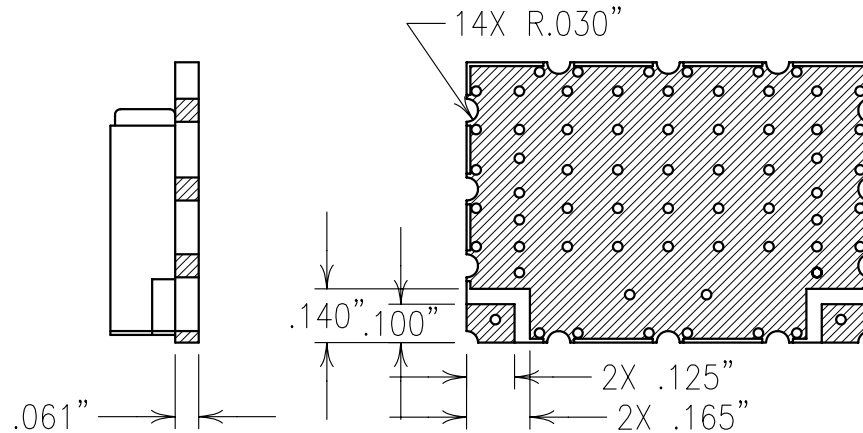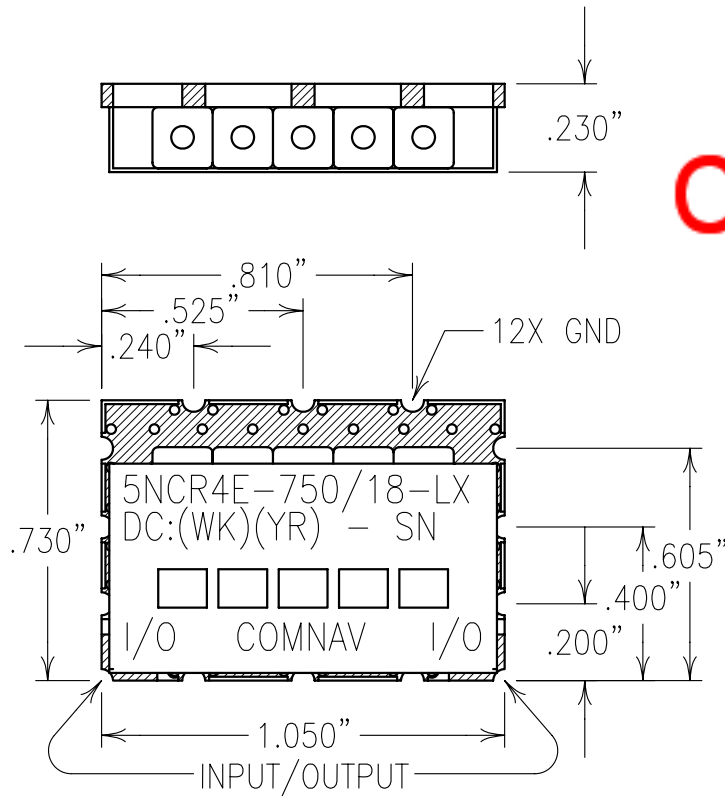

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



NOTES:

RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY OR REFLOW NOT TO EXCEED AS INDICATED BELOW:

TEMP.(°C) MAX.TIME(SEC)

215	90
230	60
245	30
260	15

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125/100 OR BETTER REMOVE ALL BURRS	DRAWN BY PBF	A	26JUL05	KJR	DEV. GEN. REV. PER 2412
	ENGINEER KJR	II	21JUL05	KJR	DEV. INI. ISS. PER 2408
	SCALE 2:1	REV	DATE	BY	DCN No. REMARKS
ENGLISH (INCHES) .XX ±.02 .XXX ±.01	METRIC (MM) .X ±.25 .XX ±.13	DATE 26JUL05	APPLIC: CERAMIC COAXIAL FILTER		
ANGLES ± 0° 30'	FINISH: BOARD: NI/AU JACKET: NI/SILVER RESONATOR: SILVER		DRAWING No. 0L0599		SHEET/OF 1/1

