
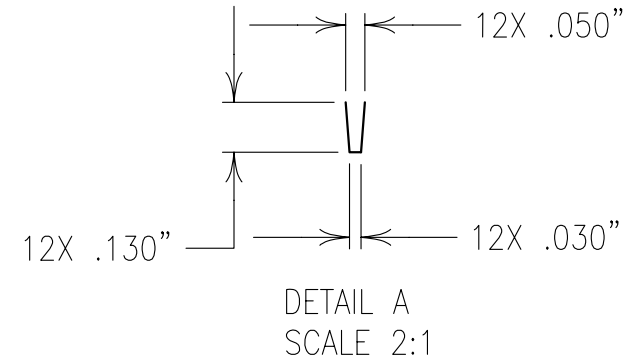
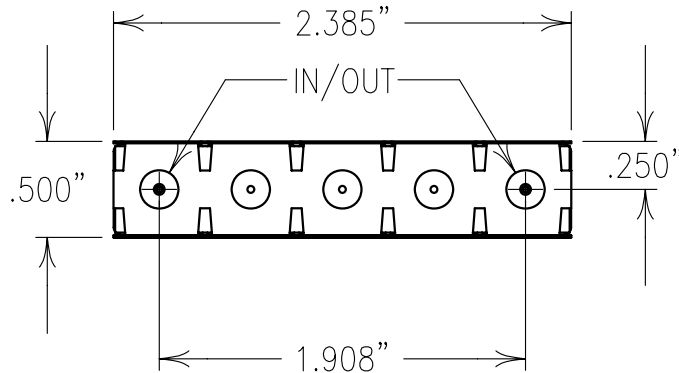
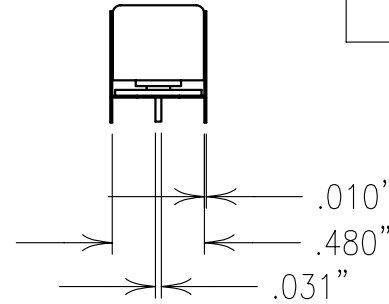


COPY


ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	1220 MHz
3 dB BANDWIDTH:	17.0 MHz NOM
LOSS @ F0:	2.5 dB MAX
VSWR:	1.7:1 TYP
REJECTION:	
60 dBc MIN:	1190 MHz
60 dBc MIN:	1250 MHz

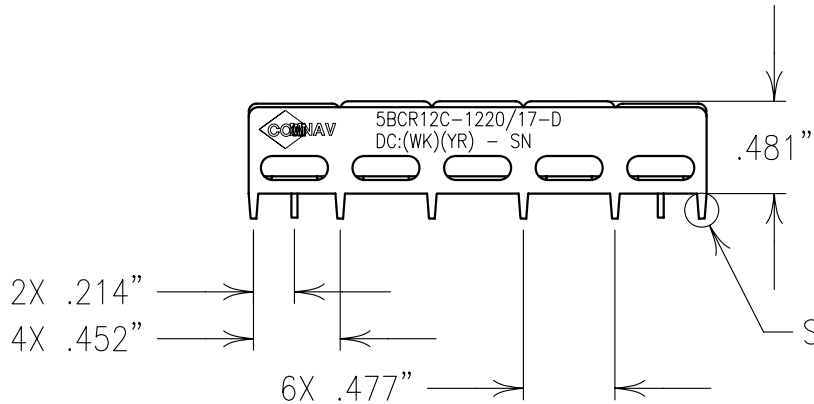

NOTES:

DC: IS ON ONE SIDE ONLY.
 PART MAY BE EXPOSED TO 240°C FOR 30 SEC.,
 OR 260°C FOR 15 SEC.
 FOR BEST RESULTS HAND OR WAVE SOLDERING IS SUGGESTED.
 FOR RECOMMENDED FOOTPRINT SEE FP0076.

FILTER IS ROHS COMPLIANT.
 FILTER MAY BE ETCHED OR LABELED.

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.					
ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY	A	22SEP06	KJR	DEV. GEN. REV. PER 2571
MACHINED SURFACES TO BE 125 / OR BETTER	ENGINEER	II	27JUL06	KJR	DEV. INI. ISS. PER 2544
REMOVE ALL BURRS	REV		DATE	BY	DCN No. REMARKS
ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC: CERAMIC COAXIAL FILTER		
.XX ±.02	.X ±.50	1:1	TITLE: 5BCR12C-1220/17-D		
.XXX ±.010	.XX ±.25	DATE	DRAWING No. 010663		
ANGLES ± 0° 30'	22SEP06	FINISH: JACKET: NI/SILVER RESONATOR: SILVER PINS: TIN PLATED		SHEET OF 1 1	
