
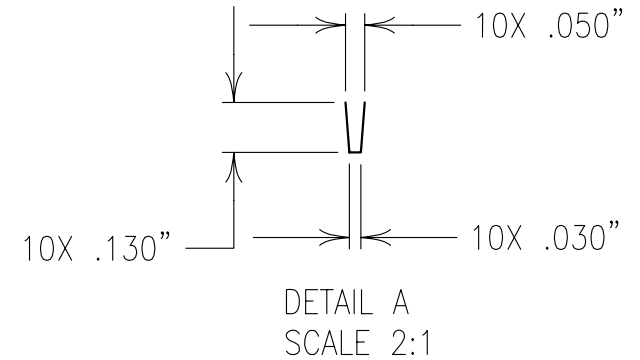
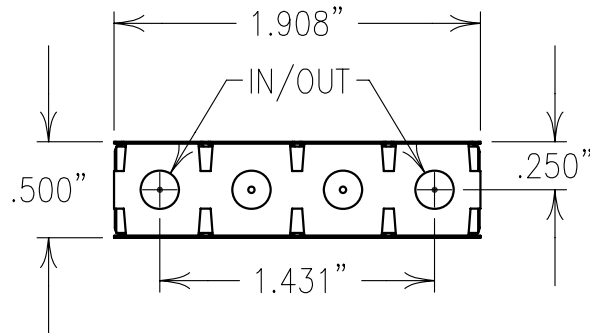
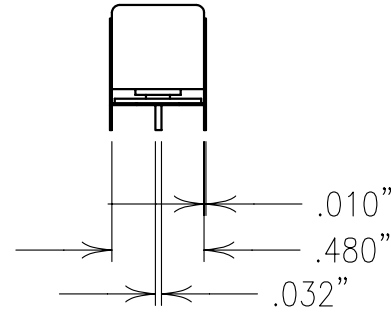


ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 1090 MHz NOM  
 3 dB BANDWIDTH: 10±2 MHz  
 LOSS @ FO: 2.4 dB MAX  
 VSWR: 1.5:1 TYP  
 40 dBc REJECTION: FO±36 MHz

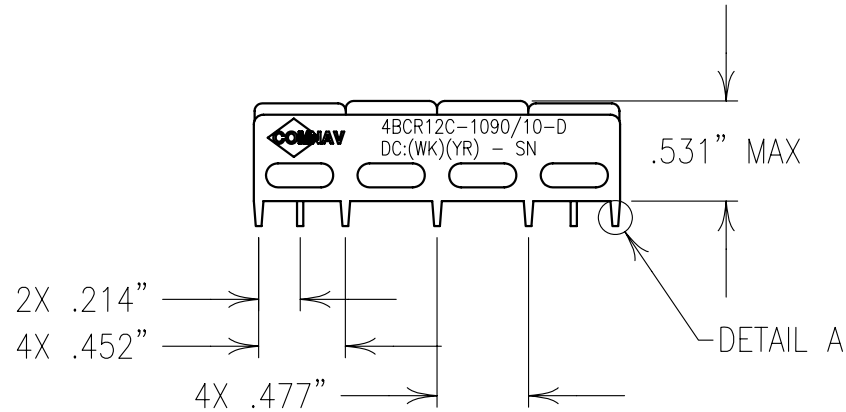

**COPY**

**CUSTOMER VALIDATION:**


NOTES:

DC: IS ON ONE SIDE ONLY.

PART MAY BE EXPOSED TO 240°C FOR 30 SEC.,  
 OR 260°C FOR 15 SEC.  
 FOR BEST RESULTS HAND OR WAVE SOLDERING IS SUGGESTED.

FILTER IS ROHS COMPLIANT.

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



ENGLISH / METRIC ENGLISH	CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY					
MACHINED SURFACES TO BE 125 / OR BETTER	ENGINEER	II	02AUG07	KJR	DEV.	INI. ISS. PER 2714
REMOVE ALL BURRS	KJR	REV	DATE	BY	DCN No.	REMARKS
ENGLISH (INCHES) .XX ±.02 .XXX ±.010	METRIC (MM) .X ±.50 .XX ±.25	SCALE 1:1	APPLIC: CERAMIC COAXIAL FILTER			
ANGLES ± 0° 30'	DATE 07AUG07	TITLE: 4BCR12C-1090/10-D				
	FINISH: JACKET: NI/SILVER RESONATOR: SILVER PINS: TIN PLATED	DRAWING No. 0L0758			SHEET OF 1 1	