
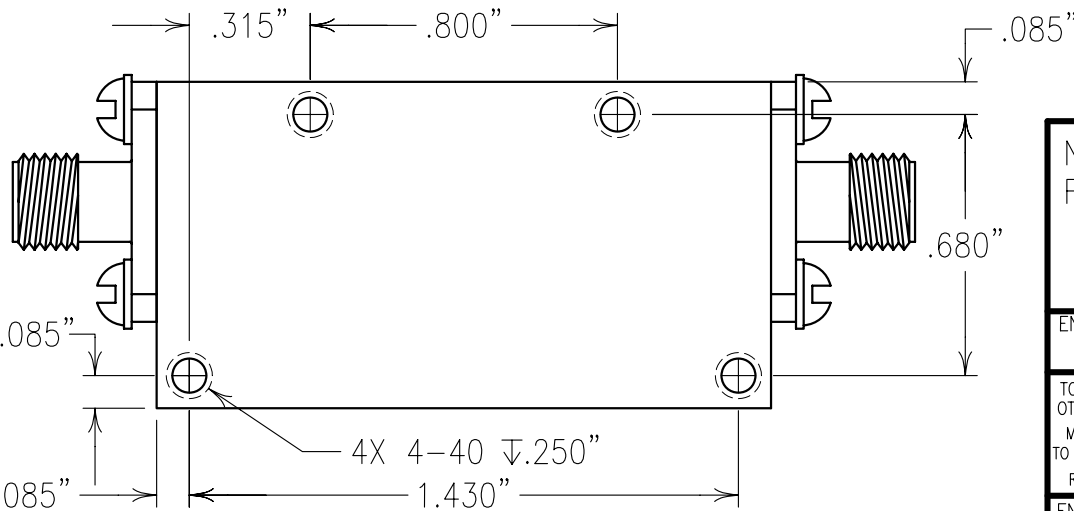
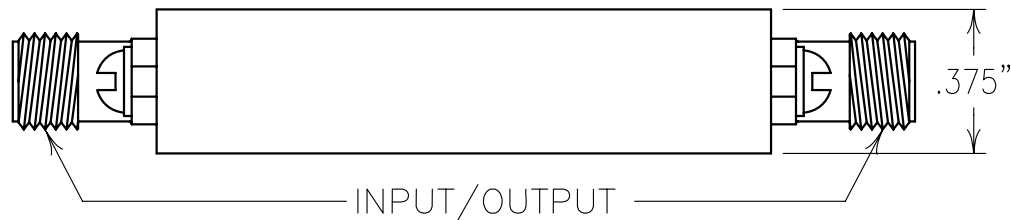


2


1

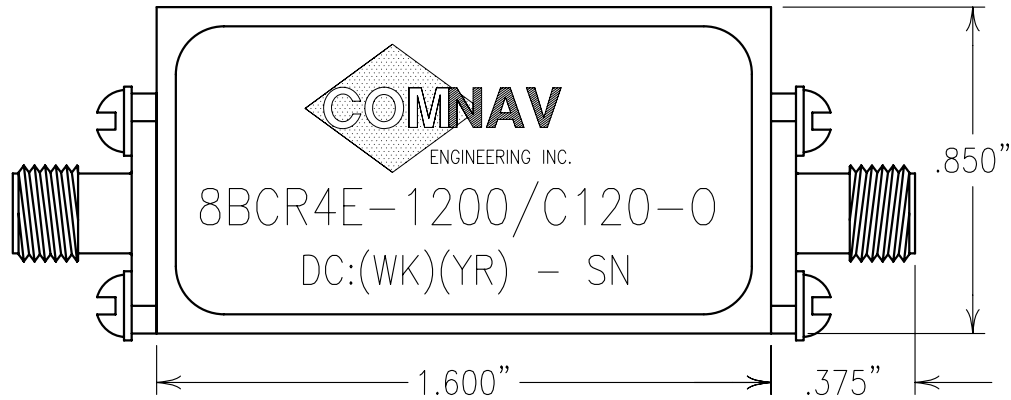


### ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 1200 MHz  
 3 dB BANDWIDTH: 100 MHz MIN  
 INSERTION LOSS: 2.0 dB MAX @ FO  
 RETURN LOSS: 1.5:1 TYP.  
 REJECTION:  
 65 dBc MIN @ 1100 MHz  
 65 dBc MIN @ 1300 MHz

**COPY**

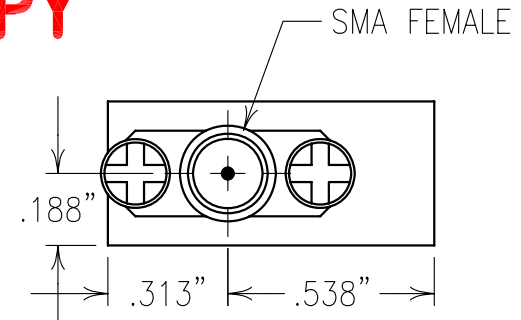

NOTES:  
 FILTER IS ROHS COMPLIANT.



ENGLISH / METRIC ENGLISH	CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY	A	05NOV07	KJR	DEV.	GEN. REV. PER 2769
MACHINED SURFACES TO BE 125 OR BETTER	ENGINEER	II	28SEP07	KJR	DEV.	INI. ISS. PER 2752
REMOVE ALL BURRS	KJR	REV	DATE	BY	DCN No.	REMARKS
ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC: CERAMIC FILTER			
.XX ±.01	.X ±.2	2:1	DATE	TITLE:	8BCR4E-1200/C120-0	SHEET OF 1 1
.XXX ±.005	.XX ±.13		05NOV07			
ANGLES ± 0° 30'	MATERIAL: LID: NICKEL/SILVER BASE: ALUMINUM 6061-T6			DRAWING No.		
	FINISH: LID: NONE BASE: SILVER MATTE OVER COPPER WITH TARNA-BAN MILSPEC QQS-365			0L0784		

### Customer Validation:

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.