




2

1

ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 3360 MHz
 3 dB BANDWIDTH: 70 MHz MIN
 INSERTION LOSS: 3.0 dB MAX @ F₀
 VSWR: 1.5:1 TYPICAL
 REJECTION:
 45 dBc MIN @ 3120 AND 3600 MHz
 65 dBc MIN @ 2880 AND 3840 MHz

COPY

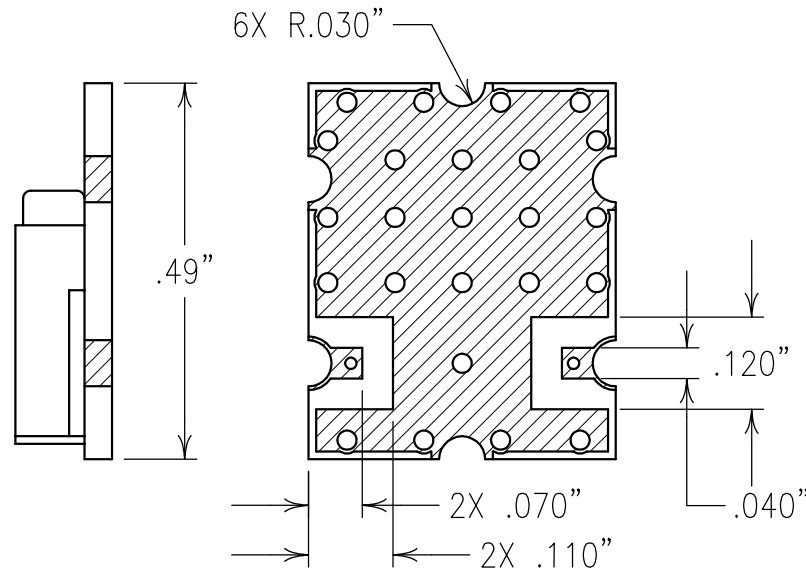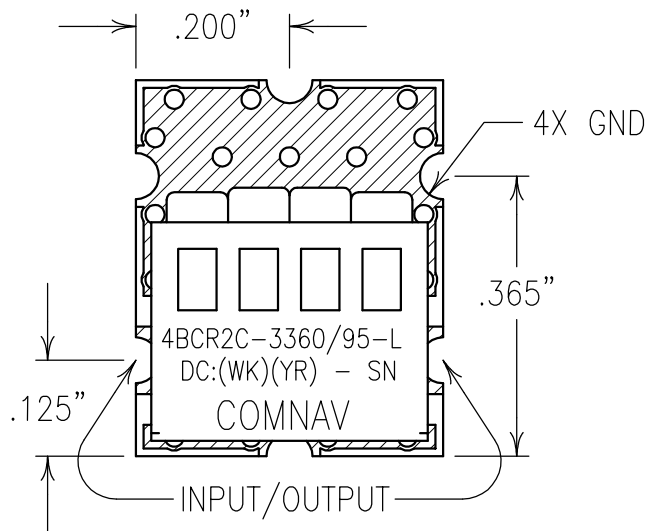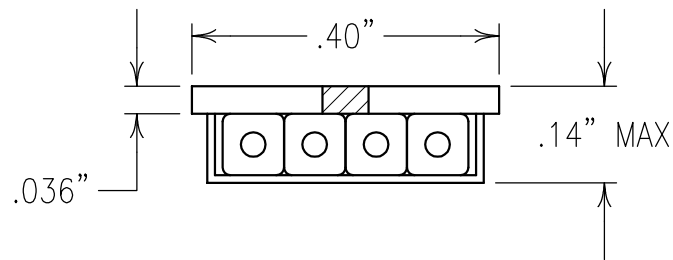


NOTES:


RECOMMENDED ATTACHMENT METHOD: SILVER EPOXY
 OR REFLOW NOT TO EXCEED AS INDICATED BELOW:
 TEMP.(°C) MAX. TIME(SEC)

215	90
230	60
245	30
260	15

FILTER MAY BE LABELED OR ETCHED.
 FILTER IS ROHS COMPLIANT.

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



ENGLISH / METRIC ENGLISH		CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY PBF				
MACHINED SURFACES TO BE 125 / OR BETTER		ENGINEER KJR	II	06FEB08	KJR	DEV.
REMOVE ALL BURRS		REV	DATE	BY	DCN No.	INI. ISS. PER 2829
		REMARKS				
ENGLISH (INCHES)	METRIC (MM)	SCALE 4:1	APPLIC: CERAMIC COAXIAL FILTER			
.XX ±.02 .XXX ±.010	.X ±.25 .XX ±.13	DATE 15FEB08	TITLE: 4BCR2C-3360/95-L			
ANGLES ± 0° 30'		FINISH: BOARD: NI/GOLD JACKET: NI/SILVER RESONATOR: SILVER			DRAWING No. OL0834	
 COMNAV ENGINEERING INC						SHEET OF 1 1

