
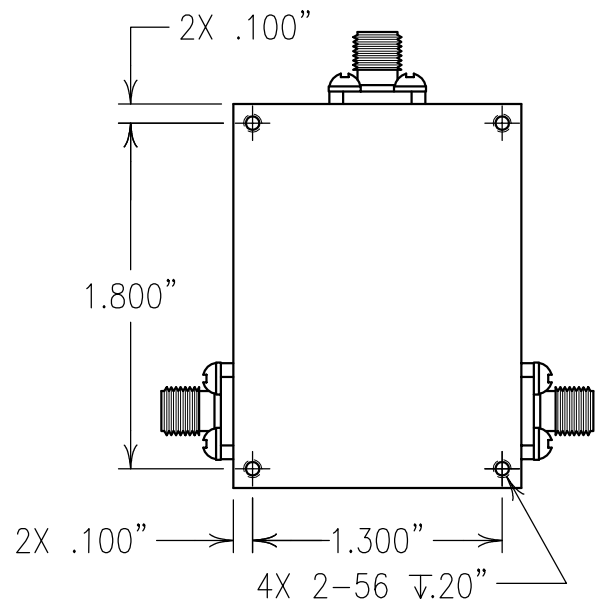
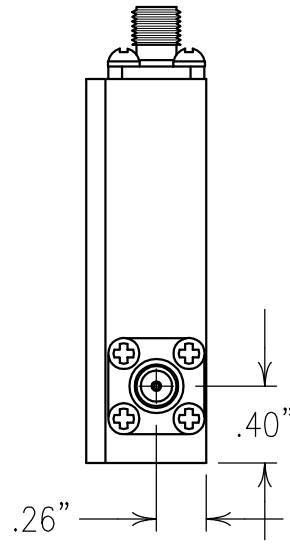


**COPY**

ELECTRICAL CHARACTERISTICS	
CHANNEL 1 PASSBAND:	DC-455 MHz
CHANNEL 1 REJECTION:	
514-3,000 MHz:	50 dBc
CHANNEL 2 PASSBAND:	463-3,000 MHz
CHANNEL 2 REJECTION:	
DC-403 MHz:	50 dBc
CROSSOVER REJECTION (BOTH):	
459±1 MHz:	5 dBc
PASSBAND LOSS (BOTH):	2.5 dB MAX

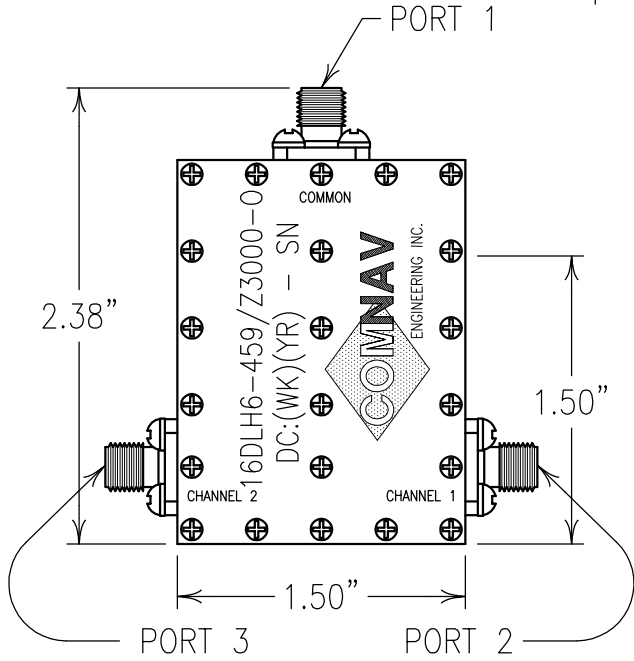

ENGLISH / METRIC	CHECKED BY	DATE	BY	DCN No.	REMARKS
ENGLISH	B	14SEP09	MJG	DEV.	GEN. REV. PER 3113
TOLERANCES UNLESS OTHERWISE SPECIFIED	A	23JUL09	MJG	DEV.	GEN. REV. PER 3093
MACHINED SURFACES TO BE 125 OR BETTER	II	03JUL08	KJR	DEV.	INI. ISS. PER 2897
REMOVE ALL BURRS	REV	DATE	BY	DCN No.	REMARKS

NOTES:  
 FILTER MAY BE LABELED OR ETCHED.  
 FILTER IS ROHS COMPLIANT.

ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC:	TITLE:	SHEET OF
.XX ±.01	.X ±.2	1:1	CHIP AND WIRE FILTER	16DLH6-459/Z3000-0	1 1
.XXX ±.005	.XX ±.13	DATE			
ANGLES ± 0° 30'		17SEP90			

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

**COMNAV** ENGINEERING INC.  
 MATERIAL: ALUMINUM  
 FINISH: SILVER

DRAWING No.  
 0L0907