
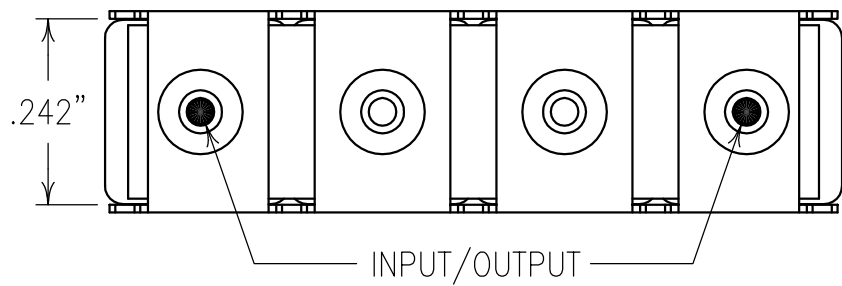


2

1

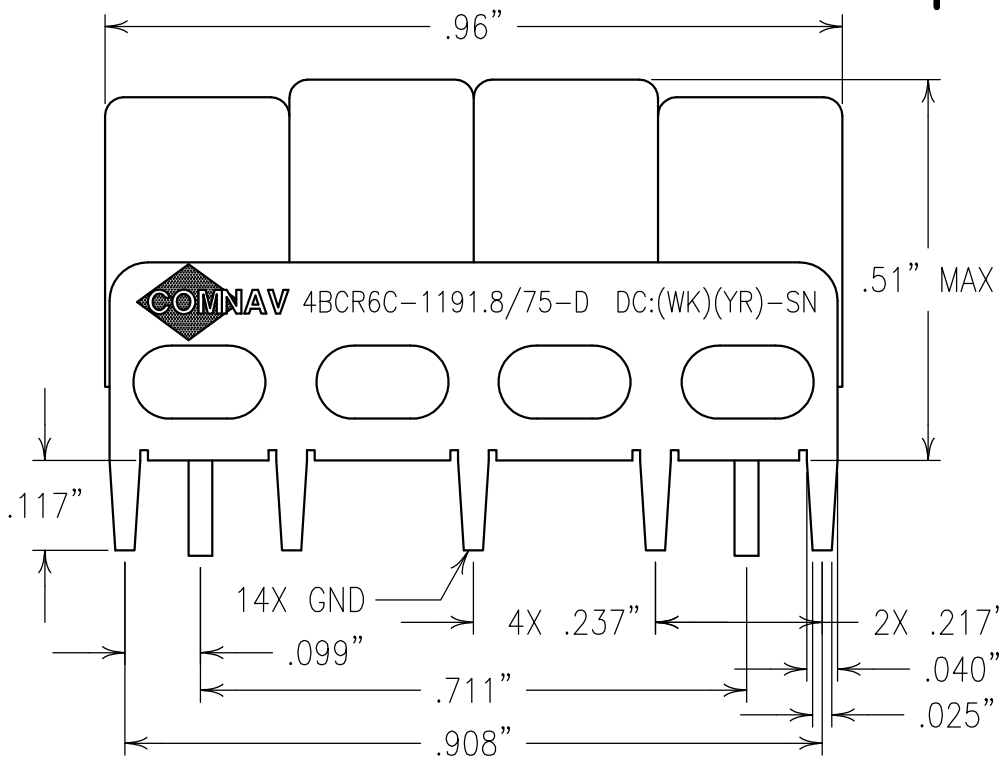

ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 1191.8 MHz
 3 dB BANDWIDTH: 75 MHz MIN
 INSERTION LOSS: 1.0 dB MAX @ FO
 VSWR: 1.7:1 TYPICAL
 REJECTION:
 25 dBc MIN @ 1100 MHz
 30 dBc MIN @ 1300 MHz

COPY

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY PBF	II	10JUL08	KJR	DEV.
ENGLISH (INCHES) .XX ±.02 .XXX ±.010	METRIC (MM) .X ±.25 .XX ±.13	SCALE 4:1	DATE 14JUL08	APPLIC: CERAMIC COAXIAL FILTER	REMARKS INI. ISS. PER 2898
ANGLES ± 0° 30'	ENGINEER KJR	REV	DATE	BY	DCN No.

NOTES:
 HAND OR WAVE SOLDERING.
 MAX REFLOW TEMP. 240°C FOR 30 SEC.,
 OR 260°C FOR 15 SEC.

FOR RECOMMENDED FOOTPRINT SEE FP0022.

FILTER IS ROHS COMPLIANT



FINISH: JACKET: NI/SILVER
 RESONATOR: SILVER
 PINS: TIN PLATED BRASS

DRAWING No. 0L0916
 SHEET OF 1 1