

2





1

### ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 1621 MHz  
 PASSBAND: 1675-1850 MHz  
 PASSBAND LOSS: 1.0 dB MAX  
 VSWR: 1.5:1 TYP  
 REJECTION:  
 50 dB MIN @ 1616-1626.5 MHz  
 OPERATING TEMP: -25 TO +85 °C  
 POWER HANDLING: 1 WATT MIN

NOTES:

B

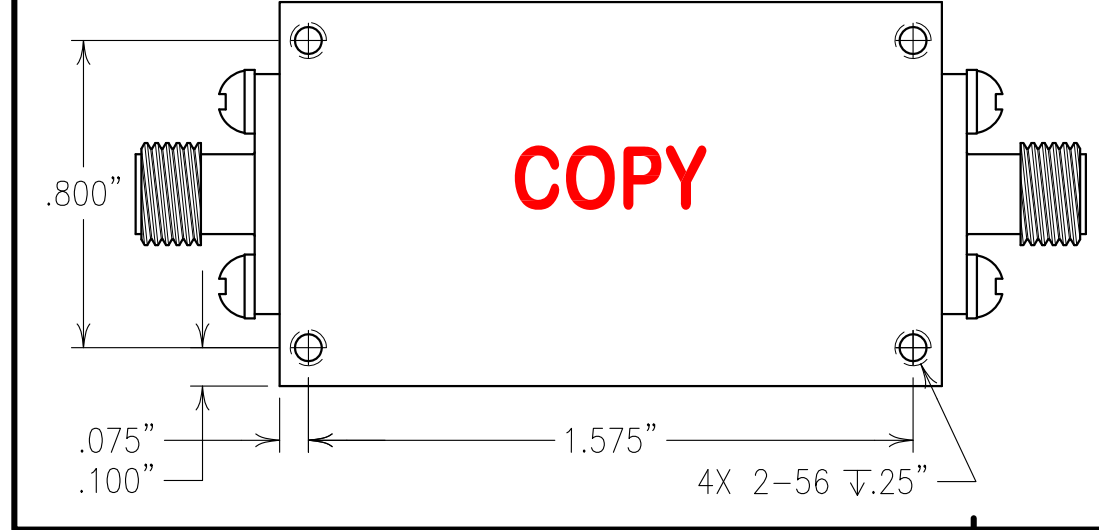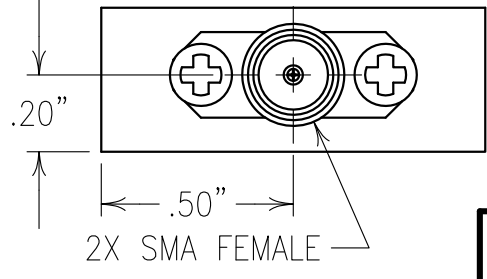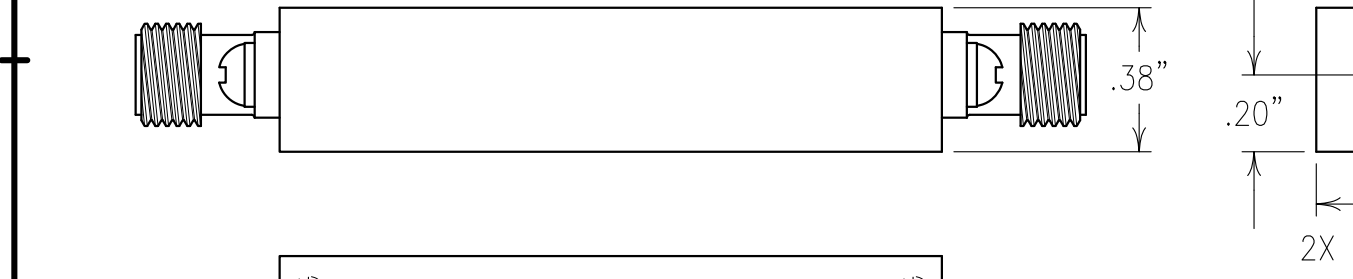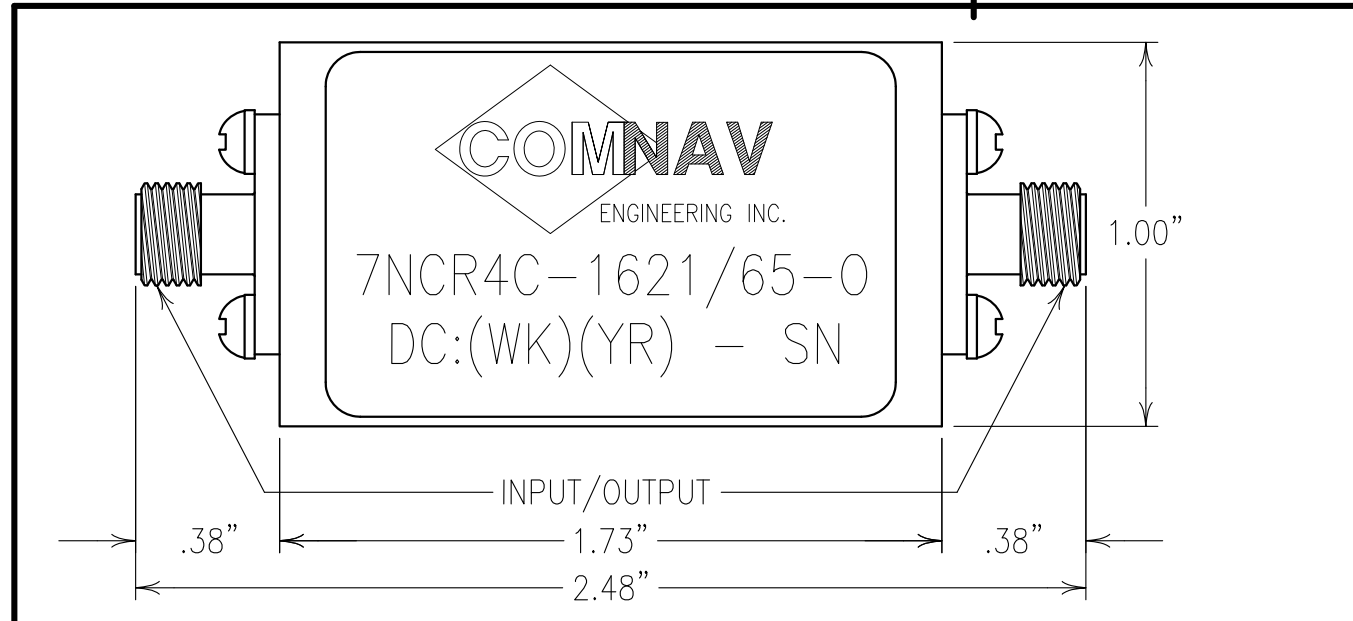

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC CHECKED BY ENGLISH					
TOLERANCES UNLESS OTHERWISE SPECIFIED TO BE 125/100 OR BETTER REMOVE ALL BURRS	DRAWN BY PBF				
	ENGINEER KJR	REV II	DATE 23JAN13	BY KJR	DEV. PER INI. ISS. PER 3626
					REMARKS

ENGLISH (INCHES) .XX ±.02 .XXX ±.01	METRIC (MM) .X ±.2 .XX ±.13	SCALE 2:1	APPLIC: CERAMIC FILTER
ANGLES ± 0° 30'	DATE 25JAN13	TITLE: 7NCR4C-1621/65-0	SHEET OF 1 1
MATERIAL: ALUMINUM FINISH: SILVER		DRAWING No. OL1327	

A