


ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 782 MHz
 PASSBAND: 777-787 MHz
 PASSBAND FLATNESS: 0.75 dB MAX
 INSERTION LOSS: 3.0 dB MAX @ F0
 VSWR: 1.5:1 TYPICAL
 REJECTION:
 40 dBc MIN @ 850-5000 MHz
 20 dBc MIN @ 770 MHz
 53 dBc MIN @ 751 MHz

COPY

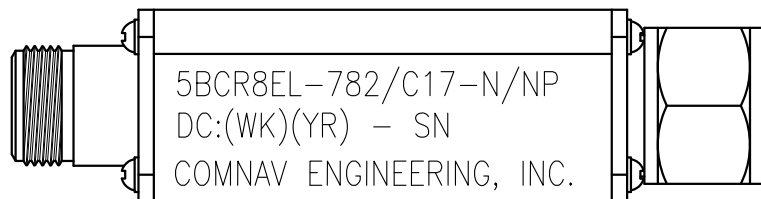

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY				
MACHINED SURFACES TO BE 125/100 OR BETTER	ENGINEER	II	30APR13	KJR	DEV. INI. ISS. PER 3656
REMOVE ALL BURRS	ENGINEER				
	KJR	REV	DATE	BY	DCN No. REMARKS

ENGLISH (INCHES)	METRIC (MM)	SCALE	APPLIC:	
.XX ±.02	.X ±.5	1:1	CERAMIC COAXIAL FILTER	
.XXX ±.010	.XX ±.25	DATE	TITLE:	SHEET OF
		06MAY13	5BCR8EL-782/C17-N/NP	1 1

MATERIAL: ALUMINUM	DRAWING No.
FINISH: SILVER OVER COPPER WITH TARN-BAN MILSPEC QQ-S-365	0L1340

NOTES:

FILTER MUST BE ETCHED.
 FILTER IS ROHS COMPLIANT.