


2




1

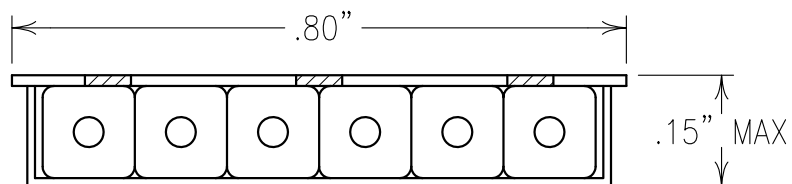

COPY


ELECTRICAL CHARACTERISTICS

CENTER FREQUENCY: 2650 MHz
 3 dB BANDWIDTH: 540 MHz NOM
 PASSBAND: 2400-2900 MHz
 P.B. INSERTION LOSS: 4.0 dB GOAL
 VSWR: 2.0:1 TYPICAL
 REJECTION:
 50 dBc GOAL @ DC-2100 MHz
 40 dBc GOAL @ 3000-3500 MHz
 OPERATING TEMP.: -20 TO +75°C

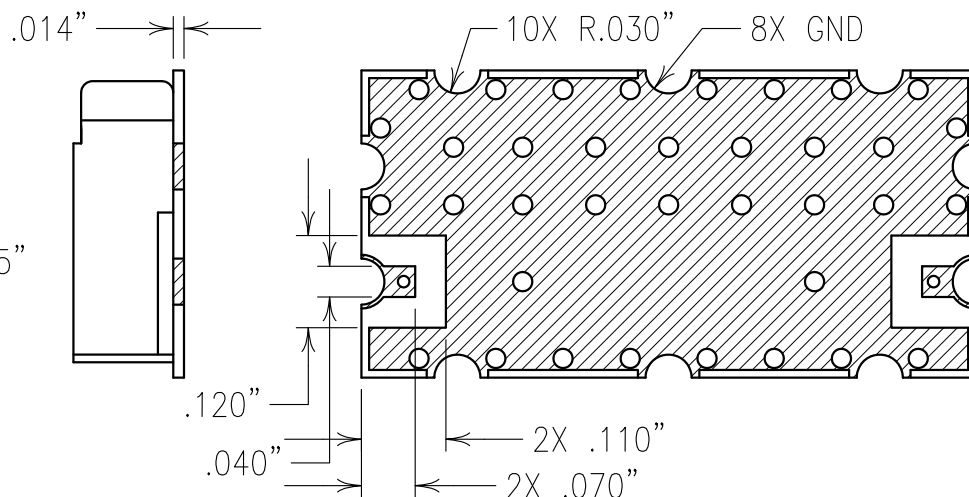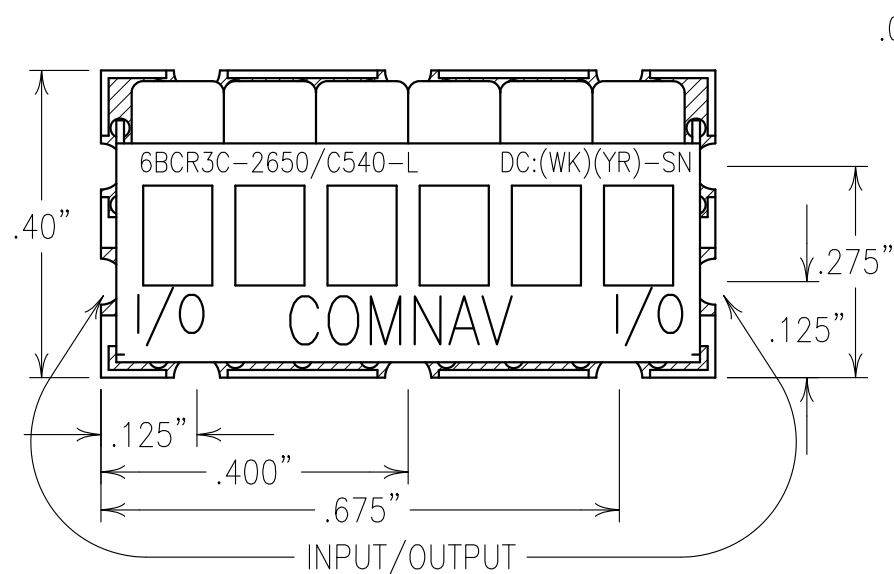

NOTES:

FILTER MAY BE LABELED OR ETCHED.
 FILTER IS ROHS COMPLIANT.

ENGLISH / METRIC ENGLISH		CHECKED BY						
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS		DRAWN BY PBF						
		ENGINEER KJR		II	07OCT14	KJR	DEV.	INI. ISS. PER 3848
		REV	DATE	BY	DCN No.	REMARKS		
ENGLISH (INCHES)	METRIC (MM)	SCALE 4:1		APPLIC: CERAMIC COAXIAL FILTER				
.XX ±.02 .XXX ±.010	.X ±.25 .XX ±.13	DATE 08OCT14		TITLE: 6BCR3C-2650/C540-L				
ANGLES ± 0° 30'		FINISH:			DRAWING No.			SHEET C 1
		BOARD: NI/GOLD JACKET: NI/SILVER RESONATOR: SILVER			OL1460			