

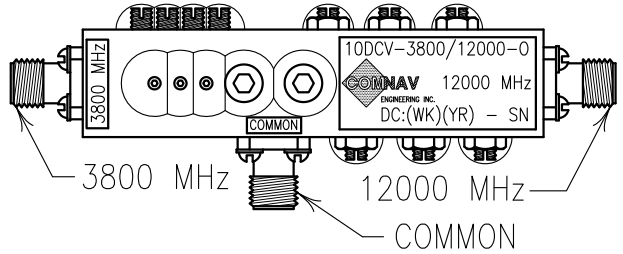



2



1

ELECTRICAL CHARACTERISTICS

LOWER PASS FREQUENCY: 3400-4200 MHz
 UPPER PASS FREQUENCY: 10900-13100 MHz
 INSERTION LOSS: 1.0 dB MAX @ PASSBANDS
 RETURN LOSS: 9.54 dB MIN/15 dB GOAL
 CHANNEL TO CHANNEL ISOLATION: 70 dB MIN

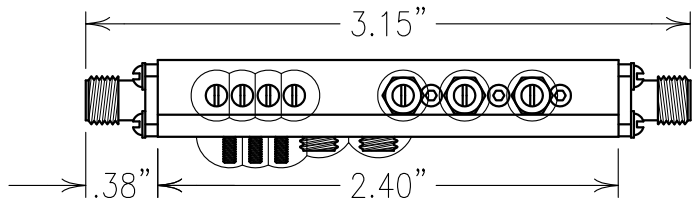


COPY

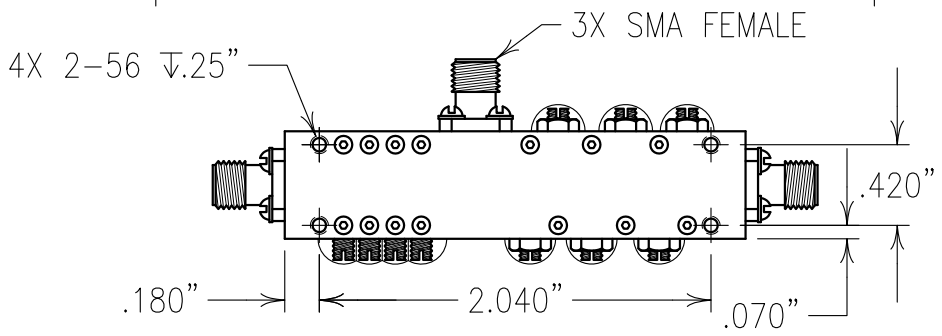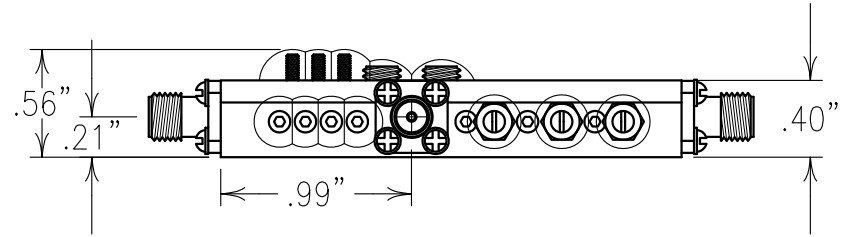

NOTES:

FILTER IS ROHS COMPLIANT.
 FILTER MAY BE LABELED OR ETCHED.



ENGLISH / METRIC CHECKED BY ENGLISH							
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY PBF	II	13APR15	MJG	DEV.	INI. ISS. PER 3906	
	ENGINEER MJG	REV	DATE	BY	DCN No.	REMARKS	
ENGLISH (INCHES) .XX ±.02 .XXX ±.01	METRIC (MM) .X ±.2 .XX ±.13	SCALE 1:1	APPLIC: COMBLINE/INTER-DIGITAL FILTER				
ANGLES ± 0° 30'		DATE 27APR15	TITLE: 10DCV-3800/12000-0			SHEET OF 1 1	

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.



MATERIAL: ALUMINUM
 FINISH: SILVER

DRAWING No.
 OL1501