




2



1

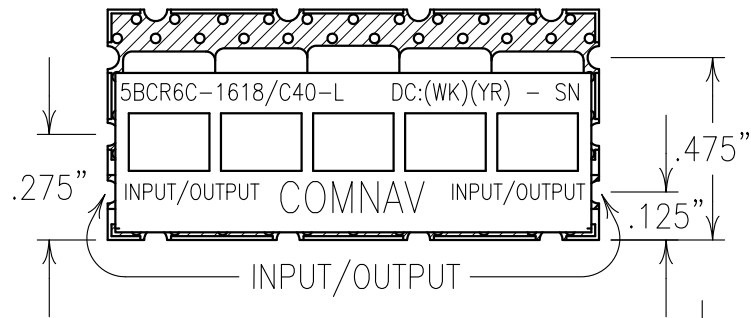

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	1618 MHz NOM
PASSBAND:	1610-1626 MHz
PB INSERTION LOSS:	2.0 dB MAX
PASSBAND VSWR:	12 dB MIN
REJECTION:	
	60 dBc MIN @ 1559 MHz
	60 dBc MIN @ 1805 MHz
	25 dBc MIN @ 1100 MHz

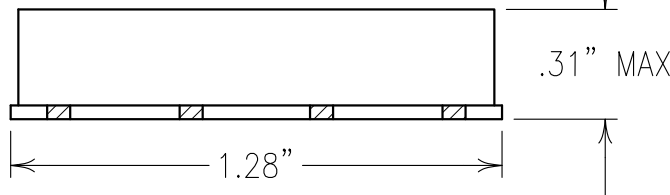

COPY

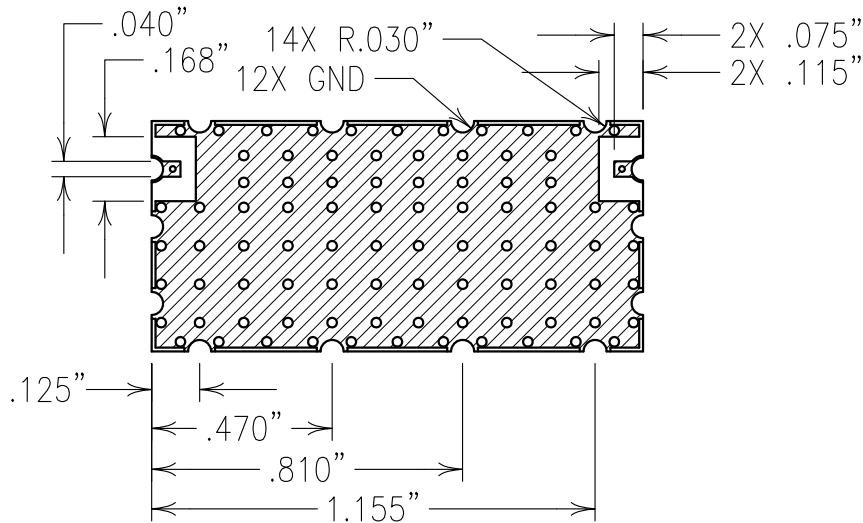

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125/ OR BETTER REMOVE ALL BURRS	DRAWN BY PBF	II	15JUN16	KJR	DEV.
	ENGINEER KJR	REV	DATE	BY	DCN No.
					REMARKS

NOTES:

FILTER IS ROHS COMPLIANT.
FILTER MAY BE LABELED OR ETCHED.

ENGLISH (INCHES) .XX ±.02 .XXX ±.010	METRIC (MM) .X ±.50 .XX ±.25	SCALE 2:1	APPLIC: CERAMIC COAXIAL FILTER
ANGLES ± 0° 30'	DATE 16JUN16	TITLE: 5BCR6C-1618/C40-L	

	FINISH: BOARD: NICKEL/GOLD JACKET: NICKEL/SILVER	DRAWING No. 0L1579	SHEET OF 1 1
--	---	-----------------------	-----------------